

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:


Corner was originally set by S.W. Lackland under GLO contract number 357, dated July 2, 1880. Notes state;

40.00 Set stone 16x12x4 in mound of stone for $\frac{1}{4}$ sec. cor, from which;

A pine 48 in. dia. bears N 45° W, 49 lks. dist.

A pine 30 in. dia. bears S 45° E, 50 lks dist.

DIAGRAM

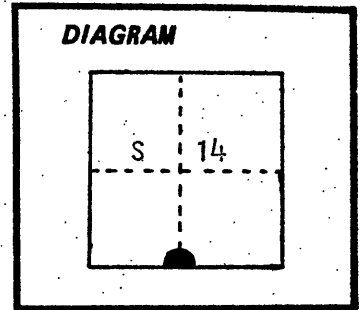

Description of corner evidence found:

Found Northwest bearing tree stump, blaze and chaining notch visible

See map of survey dated August, 1981.


Description of monument and accessories I established to perpetuate the original location of this corner:

At record bearing and distance from the bearing tree stump. I set a $1\frac{1}{2}$ inch x 30 inch iron pipe with brass cap marked as shown, 30 inches in the ground, from which;

A 14 inch white fir bears N 45° E, 75.4 feet, marked $\frac{1}{4}$ S14 BT

A 10 inch white fir bears N 75° W 20.8 feet marked X BT

Raised mound of stone

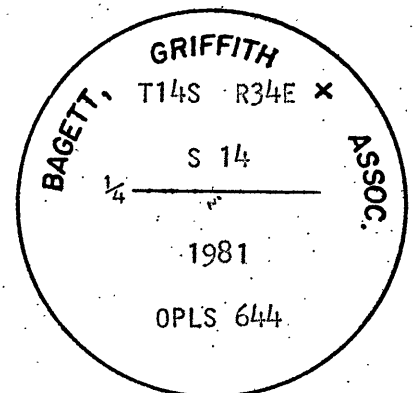

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Duane I. Griffith

OREGON
JULY 10, 1964
DUANE I. GRIFFITH
644

I used a steel tape and magnetic compass with 19° East declination in the establishment of these accessories. I set a brass washer marked OPLS 644 by the BT scribe, all distances were measured to the center of the trees.

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 12 day of Sept, 1981
Robert W. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)