

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


History of original corner establishment:

Corner was set by Homer D. Angell under
G.L.O. contract number 726 dated Sept. 27, 1900.

Original notes:

40.00 Set an iron stone, 12x12x8 ins., 8 ins. in the
ground for $\frac{1}{4}$ sec. cor. worked with $\frac{1}{4}$ in w. face
from which


a fir 12 ins. diameter bears S 23° E, 48 lks. dist. marked $\frac{1}{4}$ S 21 B.T.
a fir 28 Ins. diameter bears S 70° W, 20 lks. dist. marked $\frac{1}{4}$ S 20 B.T.




Description of corner evidence found:

1. Found original B.T.s are rotten stump remnants at record bearing and distance.
2. Found original stone with $\frac{1}{4}$ on face.

Description of monument and accessories I established to perpetuate the
original location of this corner:



Thomas D. Scherner




I set $2\frac{1}{2}$ " x 30" Alum. pipe with cap marked as shown 24" in
ground in place of stone which I placed 1' North of pipe.
From the pipe

an Engleman Spruce 13" in diam. bears S 37° W 26.1' to
face of B.T.

an Englemen Spruce 19" in diam. bears S 26° E, 12.1' to
face of B.T.

I used a compass with 20° East variation and a steel
tape.

This corner remonumented July 1981 by T. Scherner and
L. Louthan.

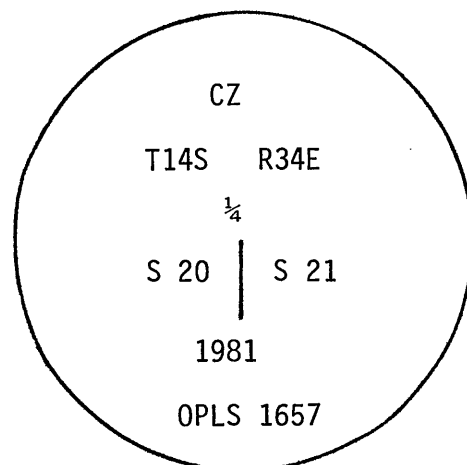

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 16 day of Nov, 1981
Robert L. Sayre by _____
(COUNTY OFFICIAL) (DEPUTY)