


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner was set by Homer D. Angell under G.L.O. contract number 726 dated Sept. 27, 1900.


Original notes:

- 40.00 Set a basalt stone 12x10x8 ins., 8 ins. in the ground for $\frac{1}{4}$ sec. cor. marked $\frac{1}{4}$ on W face, from which
a fir 12 ins. diam. bears S 70° W, 50 lks. dist. marked $\frac{1}{4}$ S21 B.T.
a fir 12 ins. diam. bears S 79° E, 25 lks. dist. marked $\frac{1}{4}$ S22 B.T.

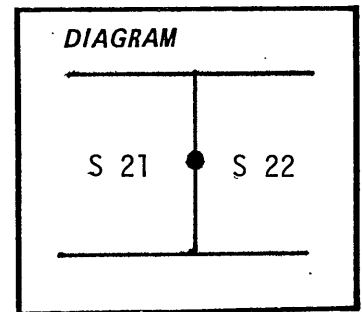


Description of corner evidence found:

1. Found original B.T. Fir 12" diam. S 70° W, 50 lks. now a stump with scribing visible.
2. Found original Fir 12" diam. S 79° E, 25 lks. scribing visible.
3. Found original stone with $\frac{1}{4}$ on West face.

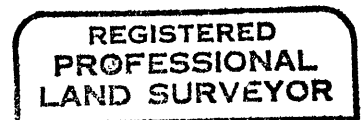


Thomas D. Scherner



Description of monument and accessories I established to perpetuate the original location of this corner:

I set $2\frac{1}{2}$ " x 30" Alum. pipe with cap 24" in ground marked as shown. I replaced stone with pipe and set stone 1' North of pipe. From the pipe a Grand Fir, 8" in diam. bears S 86° W, 17.3' to face of B.T.
an original B.T. was 12" diam. now 22" diam. Grand Fir bears N 81° E 15.0' to face of B.T.

I used a compass with 20° variation and steel tape. This corner remonumented July 1981 by T. Scherner and L. Louthan.

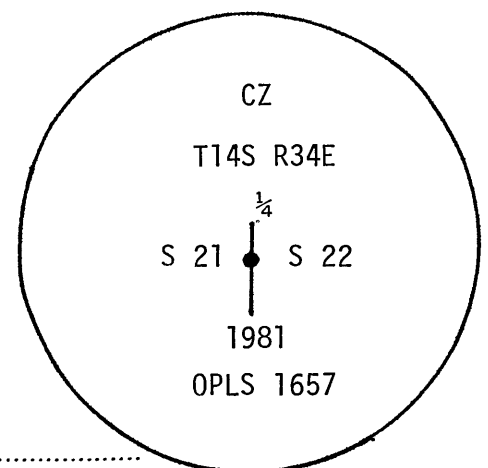

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 16 day of Nov, 1981
Robert D. Sager by _____
(COUNTY OFFICIAL) (DEPUTY)