

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


History of original corner establishment:

Corner was originally set by Homer D. Angell under GLO contract number 726, dated September 27, 1901. the notes state;

40.00 Set basalt stone, 14x10x10 ins., 10 ins. in the ground for $\frac{1}{4}$ sec. cor. marked $\frac{1}{4}$ on West face, from which;

A pine, 18 ins. diam. bears S 47° E, 45 lks. marked $\frac{1}{4}$ S 23 BT

A pine, 24 ins. diam. bears S 80° W, 50 lks. marked $\frac{1}{4}$ S 22 BT



Description of corner evidence found:

Found marked stone in mound

Found 26 inch pine stump, scribes visible, record bearing and distance for the Southwest bearing tree

Found remains of 18 inch pine, scribes visible, record bearing and distance for the Southeast bearing tree

See map of survey dated August, 1981


Description of monument and accessories | established to perpetuate the original location of this corner:

At the position of the marked stone, I set a $1\frac{1}{2}$ inch x 30 inch iron pipe with brass cap marked as shown, 28 inches in the ground, from which;

A 10 inch fir bears N 67° E, 10.2 feet, marked $\frac{1}{4}$ S23 BT

A 12 inch tamarack bears N 24° W, 62.0 feet, marked $\frac{1}{4}$ S22 BT

Buried original stone South and along side of pipe, raised mound of stone.

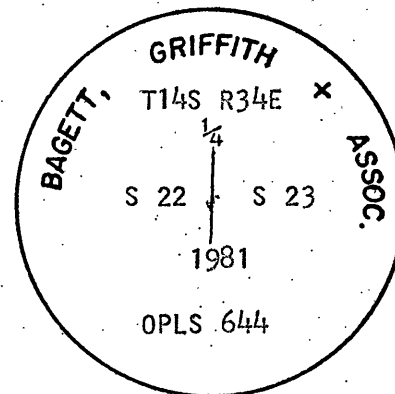

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Duane I. Griffith

OREGON
JULY 10, 1964
DUANE I. GRIFFITH
644

I used a steel tape and magnetic compass with 19° East declination in the establishment of these accessories. I set a brass washer marked OPLS 644 by the BT scribe, all distances were measured to the center of the trees.

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 1st day of Sept, 1981
Robert D. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)