

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner was set by Homer D. Angell under G.L.O. contract number 726 dated September 27, 1900.


Original notes:

80.00 Set a sand stone, 20x14x8 ins., 15 ins. in the ground for cor. of secs. 20, 21, 28 and 29 marked with 2 notches on the S and 4 notches on the E edges, from which

- a pine, 4 ins. diam., bears S $21\frac{1}{2}^{\circ}$ E 15 lks. dist. marked T14S, R34E S 28, B.T.
- a pine, 5 ins. diam., bears S 73° W 15 lks. dist. marked T14S, R34E S 29, B.T.
- a pine, 4 ins. diam. bears N 44° W 16 lks. dist. marked T14S, R34E S 20, B.T.
- a pine, 5 ins. diam. bears N 42° E 17 lks. dist. marked T14S, R34E S 21, B.T.

Description of corner evidence found:

1. Found 5" pine N 42° E 17 lks.
2. Found 5" pine S 73° W 15 lks.
3. Found S28 B.T. uprooted and displaced.
4. Found original stone in place.

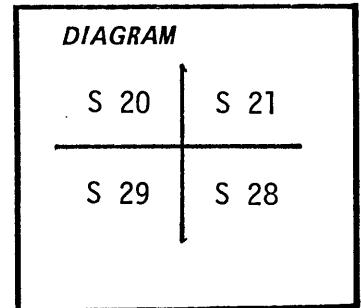

**REGISTERED
PROFESSIONAL
LAND SURVEYOR**

Thomas D. Scherner

OREGON
JULY 14, 1978
-THOMAS D. SCHERNER
1657

Description of monument and accessories I established to perpetuate the original location of this corner:

I set a $2\frac{1}{2}$ " x 30" Alum. pipe with cap marked as shown in place of stone which I placed 1' north of pipe. I placed pipe 24" in ground from which


an original B.T. was 5" diam. now an 8" diam. L. Pine bears N 46° E 11.5' to face of B.T.

a L. Pine 7" diam. bears N 64° W 8.1' to face of B.T.

an original B.T. was 5" diam. now 8" diam. L. Pine bears S 81° W 9.6' to face of B.T.

a L. Pine 6" diam. bears S 6° E 13.7' to face of B.T.

I used a compass with 20° East variation and a steel tape. This corner remonumented July 1981 by T. Scherner and L. Louthan.

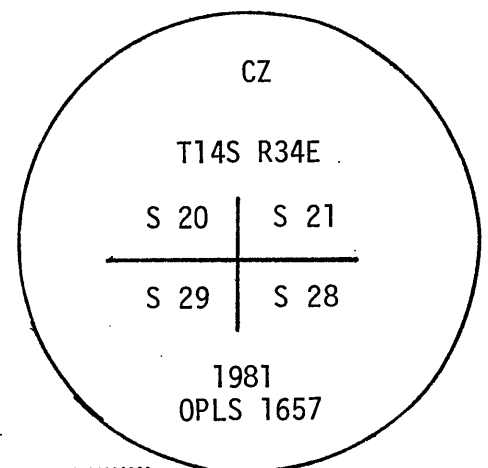

Office of Surveyor County of Grant
 State of Oregon, I hereby certify that the within instrument was filed in this office
 for record on the 15 day of Nov, 1981
Robert D. Baggett by _____
 (COUNTY OFFICIAL) (DEPUTY)