


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner was set by Homer D. Angell under G.L.O. contract number 726 dated Sept. 27, 1900.


Original notes:

set basalt stone, 20x12x12 ins. 15 ins. in the ground for $\frac{1}{4}$ sec. cor. marked $\frac{1}{4}$ on N. face, from which
a Tamarack 10 ins. diam. bears N 51° W, 25 lks. dist. marked $\frac{1}{4}$ S21, B.T.
a fir, 20 ins. diam., bears S 70° W 48 lks. dist. marked $\frac{1}{4}$ S28, B.T.

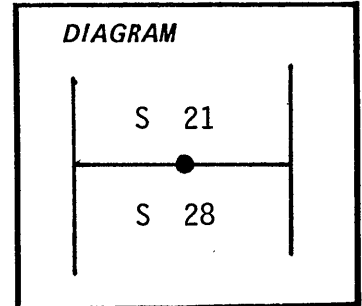


Description of corner evidence found:

1. Found both original B.T.s scribing visible on both. The Tamarack is now a snag and the fir is a rotten stump found at record bearing and distance.
2. Found the stone in place with $\frac{1}{4}$ marked on stone.

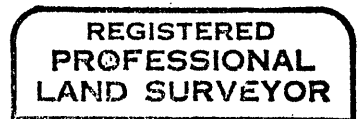


Thomas D. Scherner

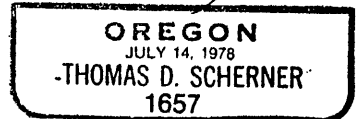

Description of monument and accessories I established to perpetuate the original location of this corner:

I set a $2\frac{1}{2}$ " x 30" Alum. pipe with cap marked as shown 22" in ground in place of stone which I placed 1' North of pipe. From the pipe
a L. Pine, 10" diam. bears S 46° W 7.4' to face of B.T.
a Doug. fir, 18" diam. bears N 69° E 41.5' to face of B.T.

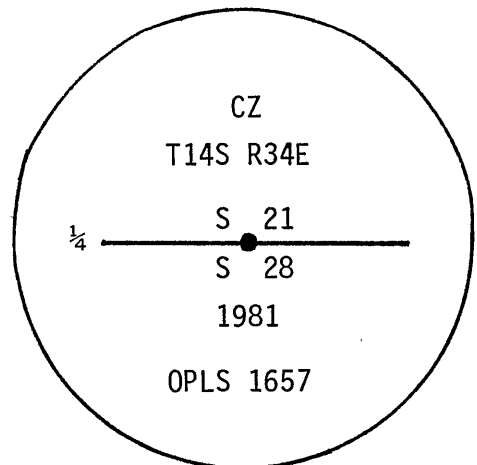

I used a compass with 20° East variation and a steel tape. This corner remonumented July 1981 by T. Scherner and L. Louthan.

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 16 day of Nov, 1981
Robert D. Degett by Thomas D. Scherner
(COUNTY OFFICIAL) (DEPUTY)