


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

None

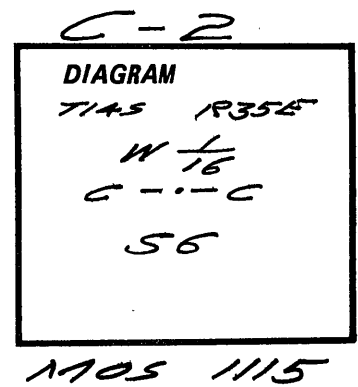

Description of corner evidence found:

None

Description of monument and accessories I established to perpetuate the original location of this corner:

Cap marked

Set 2 1/4" x 30" aluminum pipe with 2 1/2" aluminum cap rising 5" in stone mound.

Reference:

5/8" x 30" iron rod with 1 1/2" aluminum Cap mxd. RP

cap brs. West 6.7'.



*56 1/16
CW 1/16
1989
LS1020*

*W 1/16
C---C
56
1989
LS1020*

BT:

*5" PP brs. N10°W 29.1'
marked CW 1/16 56 BT*

I hereby certify the above corner was established as described in June, 1989.

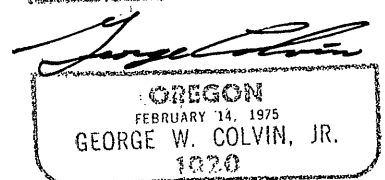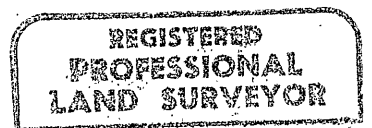

Office of *County Surveyor* County of *Grant*
State of *Oregon*, I hereby certify that the within instrument was filed in this office
for record on the *7* day of *Nov*, 19*89*
Robert D. Bager By
(COUNTY OFFICIAL) (DEPUTY)