


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

C-5

History of original corner establishment:

Original corner established in 1901 by George Campbell.
 Set stone 15x10x8 marked 1/4 on W face from which
 A pine 28" dia. brs. S49°30'E 50 lks
 A pine 18" dia. brs. N6°30'W 7 1/2 lks

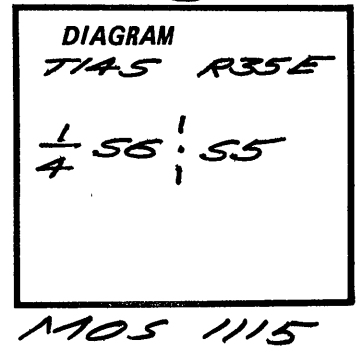


Description of corner evidence found: Searched for not found. Positions of corner and both BTs fall in road.

Description of monument and accessories I established to perpetuate the original location of this corner: Established corner position by single proportion.
 Set 2 1/4 x 30" aluminum pipe with 2 1/2" aluminum cap rising 20" in stone mound.
 New BTs:
 12" PP brs. N40°E 109.3' marked 1/4 55 BT
 11" PP brs. N81°W 43.6' marked 1/4 56 BT.

Cap marked

T14.5 R35E
 1/4
 56 | 55
 1989
 LS1020

I hereby certify the above corner was established as described in June, 1959.

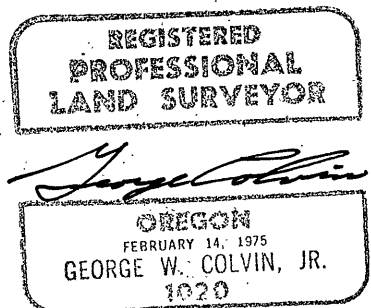

Office of County Surveyor County of Grant
 State of Oregon, I hereby certify that the within instrument was filed in this office for record on the 9 day of May, 1989
Robert D. Begett by _____
 (COUNTY OFFICIAL) (DEPUTY)