


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Corner # C-5

History of original corner establishment:

Original corner established in 1901
by G. Campbell:
Set basalt stone 12x10x5 with 1/4
marked on W face from which:
A 15" Tamarack brs. S55°E 20 lxs. (13.2')
A 15" Tamarack brs. N30°W 38 lxs. (25.1')

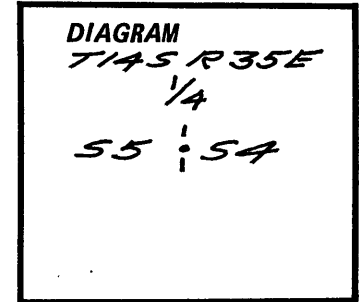

Description of corner evidence found:

Found 16"x12"x9" stone, marked 4 on down face (1/4 broken off), in deteriorated stone mound.

A 9" Tamarack snag brs. N33°W 29.0', scribes visible.
Southeast bearing tree searched for and not found.

Held marked stone as corner position.

Description of monument and accessories established to perpetuate the original location of this corner:

Set 2 1/2"x30" aluminum pipe with 3" aluminum cap
rising 5" in stone mound. Buried original stone
alongside.

Cap marked

New BTs:
A 8" Fir brs. N55°W 27.7'
marked 1/4 55 BT
A 9" Fir brs. S65°E 8.2'
marked 1/4 54 BT

T14S R35E
1/4
55 : 54
1986
LS1020

I hereby certify the above corner point was
perpetuated as described in June, 1986, U.S.F.S.
bearing tree signs were placed on all BTs and a
6" red band was painted around each BT.

Office of..... Surveyor County of..... Grant

State of..... OREGON, I hereby certify that the within instrument was filed in this office

for record on the..... 3 day of..... Sept 19..... 86

..... Robert D. Hight by
(COUNTY OFFICIAL) (DEPUTY)

