

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


History of original corner establishment:

Original corner established in 1901 by George Campbell.

Set stone 28x12x8 marked 1/4 on N face from which:

A pine 40" dia. brs. N4°E 40 lks.

A pine 24" dia. brs. S3°W 87 lks.

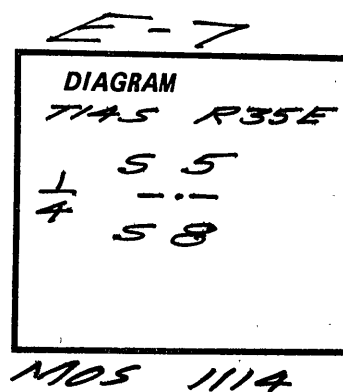

Description of corner evidence found: 23x8x8 stone marked 1/4 on N face.

Pine stump brs. N2°E 32.4' scribes visible

Pine snag brs. S1°E 58.5' scribes visible

Description of monument and accessories | established to perpetuate the original location of this corner:

Cap marked

Set 2 1/4" x 30" aluminum pipe with 2 1/2" aluminum cap rising 4" in stone mound. Buried original stone alongside.

T14S R35E

New BTs:


14" Fir brs. N50°E 19.1'

marked 1/4 55 BT


18" Fir brs. S16°E 17.4'

marked 1/4 58 BT

1/4 55
4 58
1988
LS1020



I hereby certify the above corner was perpetuated as described in Dec. 1988.

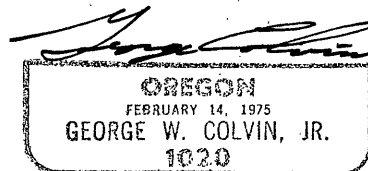

Office of County Surveyor County of Grant
 State of Oregon, I hereby certify that the within instrument was filed in this office
 for record on the 9 day of May, 1989
Colvin by Deputy
 (COUNTY OFFICIAL) (DEPUTY)