


History of original corner establishment:

Survey of 1901 by George R. Campbell  
Set a basalt stone, 15 x 10 x 8 ins.,  
10 ins. in the ground, for 1/4 sec. cor.,  
marked 1/4 on W. face; from which  
A balck pine, 10 ins. diam.,  
bears N. 87° E., 43 lks. dist.,  
marked 1/4 S. 28, B.T.  
A black pine, 10 ins. diam.  
bears N. 70° W., 44 lks. dist.,  
marked 1/4 S. 29, B.T.

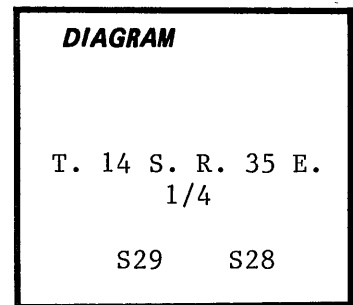

Description of corner evidence found:

Original Corner Stone, 17 x 10 x 5 ins., set firmly in the ground,  
marked 1/4 on West face.  
A Lodgepole Pine snag, 6" dia., bears S. 88° E., 43 lks dist.  
with face & scribing visible. (marked 1/4 S. 28 B.T.)  
A Lodgepole Pine windfall bears S. 75° E., 24 lks. with face  
& scribing visible - (marked 1/4 S. B.T.)\*  
No evidence of original N.W. B.T.  
A Lodgepose Pine snag, 12" dia. bears S. 77° W., 53 lks.  
with face & scribing visible. (marked 1/4 S. B.T.)\*

\* I believe these trees were marked by Bert Udell. His tag hangs on  
the S.W. B.T. dated 7/17/59.

Description of monument and accessories I established to perpetuate the  
original location of this corner:

In place of original stone monument I set  
A 2 1/2" x 30" alum. pipe, surmounted by a 3" dia.  
alum. cap; 22 ins. in the ground, surrounded by a  
mound of stone. Original stone buried alongside.  
A 6 ft. steel fence post bears North, 5.0 ft.  
A Western Larch 15" dia., bears N. 55° E., 37.0 ft.  
marked 1/4 S 28 B.T.  
A Western Larch 18" dia., bears S. 07° W., 40.9 ft.  
marked 1/4 S. 29 B.T.  
A Lodgepole pine 4" dia., bears N. 37° W., 20.5 ft.  
marked X B.T.  
A White Fir 16" dia., bears S. 45° 1/2 E. 19.2 ft.  
marked 1/4 S 28 B.T.


USDA-FS  
Standard  
Cap Marked

T. 14 S. R. 35 E.  
1/4

S29 S28

OPLS 1805  
1990

Mag. Dec. 20° E. 10/30/90



Office of Surveyor County of Grant  
State of Oregon, I hereby certify that the within instrument was filed in this office  
for record on the 11 day of Feb, 1991  
Robert D. Bayett by \_\_\_\_\_  
(COUNTY OFFICIAL) (DEPUTY)