

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Nothing set in original survey

DIAGRAM

S 31
WEE, 1/256

Description of corner evidence found:

None

Description of monument and accessories | established to perpetuate the original location of this corner:

Set 3" ALuminum cap on 2½" Aluminum pipe 30" long & buried 26" in ground with mound of stone to cap.

New Bearing Trees:

6" Lodgepole Pine, N19°W, 16.5', Scribed WEE 1/256 S31, B.T.
8" Spruce, N35°E, 1.0', Scribed WEE 1/256 S31, B.T.

All B.T.'s have sign 54-4 & 54-3 attached. Set steel guard post with 54-9 & 54-2 sign, 3' east of monument. Painted red band around bearing trees.


Witnesses: David Scott, Party Chief
Richard Larson, Chainman

MONUMENT STAMPED:

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Edgar W. Graves

OREGON
JULY 14, 1972
EDGAR W. GRAVES
980

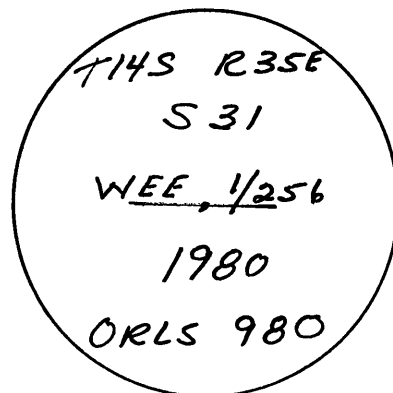

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 14 day of Jan, 1981
Robert D. Dejeu by _____
(COUNTY OFFICIAL) (DEPUTY)