CORNER RESTORATION

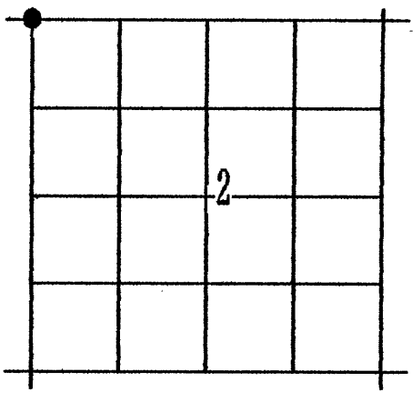

CORNER: NW Sec 2 TWP 14S. RANGE 31E.

ORIGINAL SURVEY BY: Bamford Robb

CONTRACT NUMBER: 357

CONTRACT DATE: July 2, 1880

Subsequently remonumented by Robert D. Bagett, County Surveyor, March 16, 1984 See Corner restoration records.

ORIGINAL DESCRIPTION: Intersect Township boundary 43.48 Chs. W. of Established cor. tr. Secs. 34 and 35 at which point I set stone 24x20x14 in mound of stone for closing cor. to Secs. 2 and 3.

I found the original stone in 1984. My record states:
I removed the corner stone and at its position I set a brass disc 3 ins. diam., 3 ins. stem in a drill hole flush with bedrock with top marked as shown. Disc stem is grouted into hole and is 10 inches below the surface of the ground, from which I take NEW BEARING OBJECTS:

+
I chisel the marks BO into the S.E. face of a basalt rock outcrop, 2½ feet above ground level. The cross of which bears N. 87° 21' W., 10.07 feet.

+
I chisel the marks BO into the N.W. face of a basalt rock outcrop, 6 inches above ground level. The cross of which bears S. 41° 12' E., 9.26 feet.
...Basis of bearings is by Solar observation

RESTORATION BY, STAMP AND DATE:

R.D. Bagett
G.J. Russell
S.D. Follweiler

RECEIVED AND FILED
Feb. 16, 1995
OFFICE OF COUNTY SURVEYOR
Robert D Bagett
ATTEST: Jeremy Russell

REGISTERED PROFESSIONAL LAND SURVEYOR
Robert D Bagett
OREGON
JULY 12, 1983
ROBERT D. BAGETT
598
Renewal Date 12/31/95

January 4, 1995

Grant County Surveyor

EVIDENCE FOUND: Found a 3" brass disc grouted into bedrock 10" below ground surface, marked as shown below, set in a mound of stone.
From which: Bearing Objects;
A 2" cross chiseled in the NW face of a 6" rock outcrop bears S41°12'E., 9.28 ft. marked X BO.
A 2" cross chiseled in the SE face of a 36" rock outcrop bears N87°21'W., 10.07 ft. marked X BO.
Corner is 1' West of corner of fences running East and South, fence corner running North, South, and West is 44' South.
(Bearings based on Solar Observation)

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:
Show how trees are scribed and basis of bearings, including compass var..

The monument set in 1984 is in good condition.
From Which: I SET A NEW BEARING OBJECT:
A 2" cross chiseled in top of a 12" bedrock outcrop bears N23°E, 32.73 ft. marked X BO.

Also: I SET A NEW REFERENCE POINT:
A 5/8"x30" iron pin, bears S23°W, 25.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 1 1995 OPLS 598.

Repaired mound of stone 2 ft. base to top of cap.
Used mag. compass with 20°E var. and a steel tape.

MONUMENT MARKED
GRANT COUNTY
SURVEYOR
T13S R31E
S34

S3 | S2
T14S R31E
CC
1984
OPLS 598