

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

E-15

History of original corner establishment:

The original corner was established by Samuel W. Lackland in 1888 under Contract No. 384.

DIAGRAM

T15S R28E

S3

1/4---

S10

N 89°50'W on true line between secs 3 & 10

39.82 Set stone 14x12x6 in mound of stone for 1/4 sec cor from which

A pine 10 ins dia bears S 24° W 35 lks dist.

Description of corner evidence found:

Found a 14x12x6" stone in a mound of stone, fragmentary marks visible.

A 23" P.Pine bears S 41° W, 24.3 ft (S 24° W, 35 lks), scribed 1/4S in an opened face.

Description of monument and accessories I establish to perpetuate the original location of this corner:

Set a 2 1/2x28" aluminum monument 21" in the ground in a mound of stone and buried the original stone on the North side.

I establish new bearing trees:

A 10" Fir bears S 51° W, 13.3 ft, scribed 1/4S10BT.

A 7" Fir bears N 15° E, 6.9 ft, scribed 1/4S3BT.

T15S R28E

S3

1/4---

S10

PLS1918

1988

New BTs have 3/4" brass washers marked PLS1918 attached to the BT blaze, faces and bands painted with red tree marking paint, and BT tags and Attention or Land Survey Monument signs. A steel fence post with Attention or Land Survey Monument sign is driven approximately 3-5 feet from the corner.

Corner Set: 7/10/88

Smokey Cadastral Survey, Cont. No. 53-04H1-7-4011

Field Book: 3-74 & 4-8

Witnessed by: Tyler B. Parsons, Louise H. Parsons
Sharon Parsons, Douglas Parsons


Job No.: 8722H

PARSONS SURVEYING

1915 S.E. Stone Street

Corvallis, OR 97333

(503) 752-7515

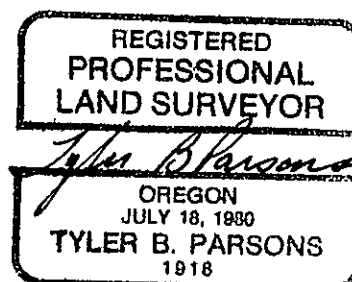

Office of COUNTY SURVEYOR

County of GRANT

State of OREGON

, I hereby certify that the within instrument was filed in this office

for record on the 4 day of Nov, 1988

Robert D. Bayne

(COUNTY OFFICIAL)

by

(DEPUTY)