


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

$\frac{1}{4}$ COR. TO SEC. 18, T15S, R29E AND TO SEC. 13, T15S, R28E, W.M.

History of original corner establishment: SET BY J.W. LACKLAND
UNDER HIS CONTRACT NO. 384, DATED MARCH 29, 1881.

HIS NOTES STATE: SET A STONE 18x8x6 IN MOUND OF
STONES FOR $\frac{1}{4}$ SEC. COR. FROM WHICH:
A PINE 8 IN DIAM. BEARS N4'E, 17 LKS.

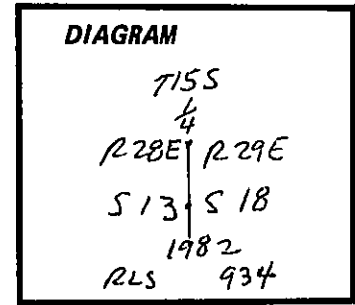

Description of corner evidence found:

FOUND OPT., A 20" DBH. P. PINE, FACE HAS BEEN OPENED, SCRIBES " $\frac{1}{4}$ S" VISIBLE,
BEARS N4'E 17 LKS. = 11.2 FT. (RECORD)

Description of monument and accessories I established to perpetuate the original location of this corner:

AT RECORD BEARING AND DISTANCE FROM FOUND OPT., I SET A 3"x30" AL. PIPE
WITH A 3 $\frac{1}{2}$ " AL. CAP STAMPED AS SHOWN ABOVE. I BURIED ORIG. STONE MON.
ALONGSIDE AND SET STONES AROUND CORNER.

MY NEW BT'S ARE AS FOLLOWS:

A 7" DBH D. FIR, SCRIBED " $\frac{1}{4}$ S18BT" BEARS N28'E, 28.5 FT.

A 6" DBH D. FIR, SCRIBED " $\frac{1}{4}$ S13BT" BEARS N68 $\frac{1}{2}$ 'W, 27.0 FT.

DATE SET: 8-26-82

WITNESS: LUIS McLIND, DALE WRIGHT

**REGISTERED
PROFESSIONAL
LAND SURVEYOR**

Victor M. McLind

**OREGON
JULY 17, 1870
VICTOR M. McLIND
934**

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 16 day of Dec, 1982
Robert D. Sext by _____
(COUNTY OFFICIAL) (DEPUTY)