

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

$\frac{1}{4}$ CORNER TO SECTIONS 16 & 17, T15S, R29E, W.M.


History of original corner establishment: SET BY S.W. LACKLAND

UNDER HIS CONTRACT N. 384 DATED MARCH 29, 1881

HIS NOTES STATES: SET STONE 15x4x4 IN MOUND OF

STONE FOR $\frac{1}{4}$ SEC. COR. FROM WHICH:

A PINE 28 IN DIA BEARS N7°E 64KS. DIST.



Description of corner evidence found:

NONE FOUND

Description of monument and accessories I established to perpetuate the original location of this corner:

I SET CORNER BY SINGLE PROPORTIONMENT.

AT CALCULATED POSITION I SET A 3"x30" AL. PIPE WITH A 3 1/2" AL. CAP STAMPED AS SHOWN ABOVE, 8" ABOVE GROUND IN STONE MOUND.



MY NEW BT'S ARE AS FOLLOWS:

A 9" DB.H. P. PINE, SERIAED " $\frac{1}{4}$ S17 BT" BEARS N65 1/2° W, 27.1 FT.

A 7" DB.H. P. PINE, SERIAED " $\frac{1}{4}$ S16 BT" BEARS N41° E, 42.4 FT.

DATE SET : 10-6-82

WITNESS: DALE WRIGHT, LUIS MCLIND

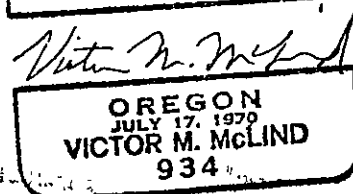

Office of..... Surveyor County of..... Grant
 State of..... Oregon hereby certify that the within instrument was filed in this office
 for record on the..... 16 day of..... Dec 1982
Robert A. Bagg by
 (COUNTY OFFICIAL) (DEPUTY)