


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Index File No. P-7

History of original corner establishment:

None set.

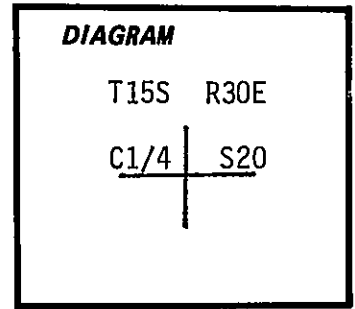

Description of corner evidence found:

Description of monument and accessories I established to perpetuate the original location of this corner:

At surveyed point:

T15S R30 WM

Set 2½" x 30" galvanized pipe with brass cap stamped:

C1/4 | S20

Set pipe 24" in ground with mound of stone to cap.

1979

OR PLS 1294

From which:

A Ponderosa Pine 10" in dia. bears N19°E, 25.0 ft., scribed
C1/4 S20 BT.

A Ponderosa Pine 6" in dia. bears S5°W, 23.2 ft., scribed
C1/4 S20 BT.

Attached 54-3 and 54-4 signs to both BT's. Attached brass washer stamped LS 1294 to foot blaze of both BT's. Painted blazes and 6" band around both BT's orange. Attached 54-2 and 54-4 signs to metal fence post 5' South of corner. Attached 54-2 and 54-9 signs to metal fence post 5' East of corner.

**REGISTERED
PROFESSIONAL
LAND SURVEYOR**

I hereby certify that the above corner was established as herein described.

OREGON
SEPTEMBER 23, 1977
HOWARD L. PERRY
1294

Witnesses: Rodger Orton
Glen Wagoner
Jeff Anderson July 10, 1979

Office of..... County Surveyor..... County of..... Grant

State of..... Oregon....., I hereby certify that the within instrument was filed in this office

for record on the 4th day of Oct., 1979

..... by
(COUNTY OFFICIAL) (DEPUTY)