


CORNER RESTORATION

W $\frac{1}{4}$ Corner
 CORNER Sec. 27 TWP 15S RANGE 30E

ORIGINAL SURVEY BY: S.W. Lackland

CONTRACT NUMBER: 357

CONTRACT DATE: July 2, 1880

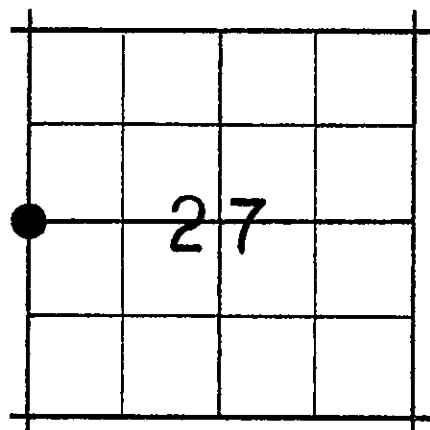

ORIGINAL DESCRIPTION:

40.00 Set post for $\frac{1}{4}$ Sec. cor. from which:
 A pine 36" in diam. brs, N48°W 115 lks. dist.
 A pine 30" in diam. brs. N55°E 178 lks. dist.

RECEIVED AND
FILED

JAN 20 1976

JOHN LIVEIRA, County Clerk

By *Petty* Deputy

RESTORATION BY, STAMP AND DATE:

R.D. Bagett

W. Gentis

REGISTERED
 PROFESSIONAL
 LAND SURVEYOR

Robert D. Bagett

OREGON
 JULY 12, 1963
 ROBERT D. BAGETT
 598

DECEMBER 16, 1975

Grant County Surveyor

EVIDENCE FOUND:

I did not find orig. corner post. However I did find the remains of two BT stumps. Established corner at record dist. from these stumps.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var.

At the cor. point: Set 1 $\frac{1}{2}$ "X30" iron pipe 26" in the ground with brass cap marked as shown: From which OLD BTs:

A 36" pine stump brs. N60°E 117.5 ft. dist. no mks. MONUMENT MARKED

A 40" pine stump brs. N40°W 75.9 ft. dist. no mks. remain.

NEW BTs.:

A 12" pine brs. N88°E 36.2 ft. dist. mkd. $\frac{1}{4}$ S27CSBT

A 12" pine brs. N34°W 66²ft. dist. mkd. $\frac{1}{4}$ S28CSBT

The corner of a barbed wire fence brs. S17°E 26 ft.

The corner of an old rail fence brs. N4°E 27 ft.

Used compass with 20° E. var. & steel tape measuring to face of blaze.

Complete and File with Office of the Grant

County Surveyor, Grant County, Oregon,

Courthouse, Canyon City, Oregon 97820

