


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

No corner previously established.



Description of corner evidence found:

None.

See Record Map of Survey No. 956.

Description of monument and accessories | established to perpetuate the original location of this corner:


At the corner point, I set a 2½x30 inch aluminum pipe with attached aluminum cap, 22 inches in the ground, and surrounded it with mound of stone, 3 ft. base, to top of cap, monument marked as shown.

From which I scribe New BT's:

A P. Pine 25 inch diam. bears S. 86° E., 39.4 feet marked CW1/16 S2 BT.

A Juniper 18 inch diam. bears S. 57° W., 141.1 feet marked CW1/16 S2 BT.

Set 6 foot steel fence posts, with appropriate signs attached, 5 feet ± South and East. Used magnetic compass with 20° E. var. and steel tape measuring to a 50d nail driven in the side center at the root crown of BT's. Attached BT and attention signs to BT's. Painted blazes and a red band around BT's. Attached brass washer marked "OPLS 598" to lower BT blaze.

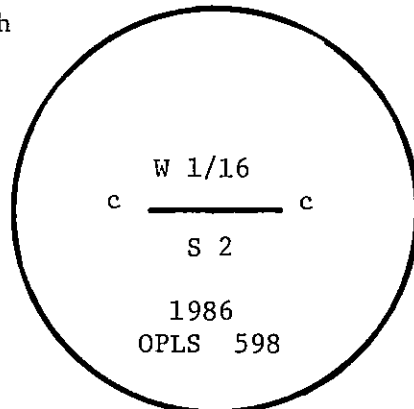

Witnesses: M. D. Bagett
J. L. Watson

Corner set: Sept. 12, 1986

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Bagett

OREGON
JULY 12, 1983
ROBERT D. BAGETT
598

Office of.....Surveyor..... County of.....Grant.....
State of.....OR....., I hereby certify that the within instrument was filed in this office
for record on the..20.. day of, ..OCT....., 19..86..
.....*Robert D. Bagett*..... by
(COUNTY OFFICIAL) (DEPUTY)