


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

No corner previously established.



Description of corner evidence found:

None.

See Record Map of Survey No. 956.


Description of monument and accessories I established to perpetuate the original location of this corner:

At the corner point, I set a 2½x30 inch aluminum pipe with attached aluminum cap 30 inches in the ground marked as shown. From which I scribe New BT's:

A Juniper 4 inch diam. bears S. 35° E., 24.4 feet marked C¼ S2 BT.

A P. Pine 4 inch diam. bears N. 72° W., 40.2 feet marked X BT.

Surrounded pipe with mound of stone 3 ft. base to top of cap. Set 6 foot steel fence posts 5 feet ± North and West. Used solar bearings and steel tape measuring to a 50d nail driven in the side center at root crown of BT's. Attached attention and BT signs to BT's. Painted blazes and red band around BT's with red tree marking paint. Attached brass washer marked "OPLS 598" to lower BT blaze.

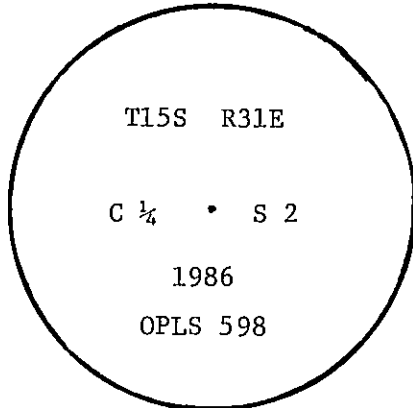

Witnesses: M. D. Bagett
J. L. Watson

Corner set Sept. 15, 1986

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Bagett

OREGON
JULY 12, 1983
ROBERT D. BAGETT
598

Office of.....Surveyor..... County of.....Grant.....
State of.....OR....., I hereby certify that the within instrument was filed in this office
for record on the..29.. day of.....Oct....., 1986
Robert D. Bagett..... by
(COUNTY OFFICIAL) (DEPUTY)