


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

No corner previously established.

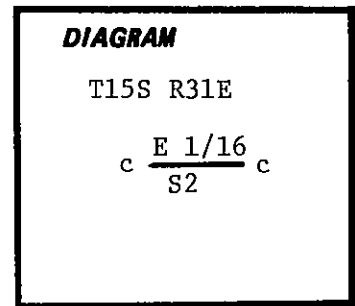

Description of corner evidence found:

None.

See Record Map of Survey No. 956.


Description of monument and accessories | established to perpetuate the original location of this corner:

At the corner point, I set a 2½x30 inch aluminum pipe with magnets sealed inside pipe top and bottom, with attached aluminum cap 30 inches in the ground, marked as shown. From which I scribe New BT's:


A P. Pine 14 inch diam. bears S. 55° W., 54.2 feet marked CE 1/16 S2 BT.

A Juniper 14 inch diam. bears N. 17° W., 69.6 feet marked CE 1/16 S2 BT.

Used solar bearings and steel tape measuring to a 50d nail driven in the side center at root crown of BT's. Attached BT tags and painted blazes red. Attached brass washer marked "OPLS 598" in the lower blaze of BT's.

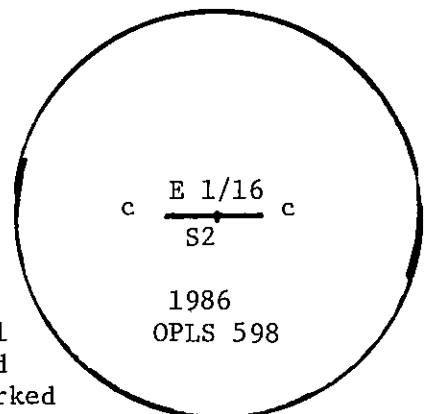

Witnesses: M. D. Bagett Corner set Sept. 15, 1986
J. L. Watson

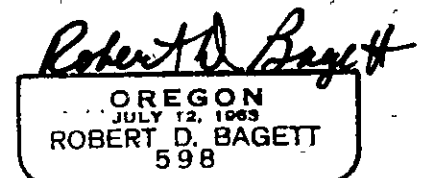

Office of.....Surveyor..... County of.....Grant.....
OR
State of....., I hereby certify that the within instrument was filed in this office
for record on the 20 day of OCT, 1986
Robert D. Bagett by
(COUNTY OFFICIAL) (DEPUTY)