


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by Bamford Robb under Contract No. 357, dated July 2, 1880. The Record states: Set basalt stone 20x14x12 in mound of stone for 1/4 Section corner, from which:

- A Pine 40 ins. diam. bears N. 10° W., 52 lks. dist.
- A Pine 24 ins. diam. bears S. 37° E., 31 lks. dist.



Description of corner evidence found:

I found no evidence of this corner. The area has been logged and a road has been built thru the corner area. I declared this corner lost and set it at single proportionate measurement between the SW and SE section corners of Section 2.

See Record Map of Survey No. 956.


Description of monument and accessories I established to perpetuate the original location of this corner:

At the corner point, I set a 2 1/2 x 30 inch aluminum pipe with attached aluminum cap 36 inches in the ground, marked as shown.

From which I scribe New BT's:

- A P. Pine 15 inches diam. bears N. 55° E., 46.3 feet marked 1/4 S2 BT.
- A P. Pine 19 inches diam. bears S. 40° E., 43.2 feet marked 1/4 S11 BT.

This corner falls in a dirt logging road. Set a 6 foot steel fence post with appropriate signs attached, 5 feet ± South. Used solar bearings and steel tape measuring to a 50d nail driven in the side center at root crown of BT's. Painted blaze and a red band around BT's with red tree marking paint. Attached attention and BT signs to BT's. Attached brass washer marked "OPLS 598" to BT lower BT blaze.

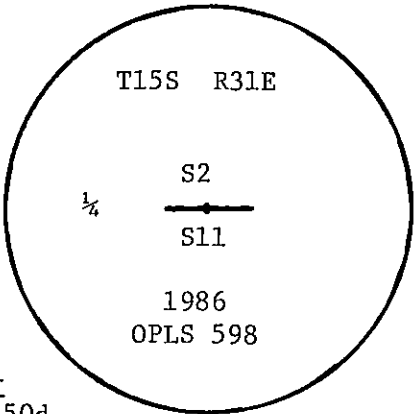

Witnesses: M. D. Bagett Corner set Sept. 12, 1986
 J. L. Watson

**REGISTERED
PROFESSIONAL
LAND SURVEYOR**

Robert D. Bagett

**OREGON
JULY 12, 1983
ROBERT D. BAGETT
598**

Office of.....Surveyor..... County of.....Grant.....
State of.....OR....., I hereby certify that the within instrument was filed in this office
for record on the 20 day of OCT, 1986
Robert D. Bagett by
(COUNTY OFFICIAL) (DEPUTY)