


CORNER RESTORATION

CORNER: S1/4 SEC. 2, TWP. 15 S., RANGE 31 E.

ORIGINAL SURVEY BY: Bamford Robb

CONTRACT NUMBER: 357

CONTRACT DATE: July 2, 1880

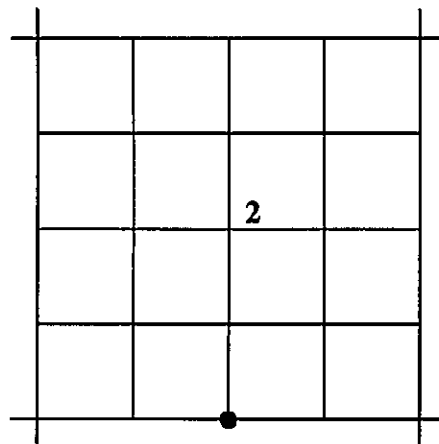

ORIGINAL DESCRIPTION: Set basalt stone 20x14x12 in mound of stone for 1/4 Section corner, from which:

A Pine 40 ins. diam. bears N.10°W., 52 lks. dist.

A Pine 24 ins. diam. bears S.37°E., 31 lks. dist.

I remonumented this corner in September 1986 by single proportionate measurement between the SW and SE corners of Section 2. See Record Map of Survey No. 956. My record states: At the corner point, I set a 2½X30 inch aluminum pipe with attached aluminum cap 36 inches in the ground, marked as shown. From which I scribe new BT's:

A P. Pine 15 inches diam. bears N55°E, 46.3 feet marked 1/4 S2 BT.

A P. Pine 19 inches diam. bears S40°E, 43.2 feet marked 1/4 s11 BT.

RESTORATION BY, STAMP AND DATE:

R.D. Bagett

M.C. Springer

J.L. Hatfield

RECEIVED AND
FILED

April 16, 2004
OFFICE OF COUNTY SURVEYOR

ATTEST:

Robert D. Bagett
Joan S. Haglund

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Bagett
OREGON
JULY 12, 1983
ROBERT D. BAGETT
598

Renewal Date 12/31/05

March 2, 2004

EVIDENCE FOUND: I found my 1986 2½" aluminum pipe badly bent, with cap separated, lying horizontally along side a recently set fence post at the corner of fences running east, west and south. I contacted the land owner who built the fence. He told me he had dug the corner out with a backhoe.

From established corner position:

Found 20" diameter P. pine, scribing visible in partially healed blaze, bears N55°E, 46.0 FT (record = N55°E, 46.3 FT). Found 24" diameter P. pine, blaze healed, bears S40°E, 43.2 FT (record = S40°E, 43.2 FT).

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings including compass var.

I reestablish the corner position from survey control from Land Partition No. 97-33, in which I found and tied this 1/4 Cor. as set in 1986.

At the corner point: I set a 1½"x30" galv. iron pipe, 30" in the ground, with attached Bagett-Griffith and Blackman brass cap marked as shown.


From which I SET NEW REFERENCE POINTS:

A 5/8"x30" iron pin, bears S54°45'W, 36.12 ft., with attached 1½" alum. cap marked BGB SURVEY MARKER

RP 1 2004 OPLS 598

A 5/8"x30" iron pin, bears N39°24'W, 33.43 ft., with attached 1½" alum. cap marked BGB SURVEY MARKER

RP 2 2004 OPLS 598

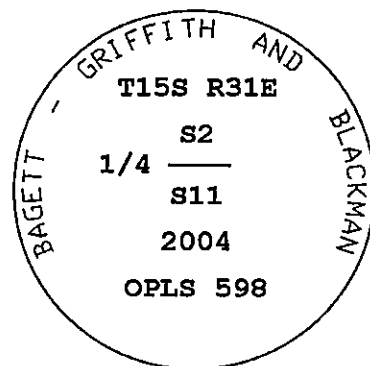

I buried the 1986 aluminum pipe and cap, south, alongside the galvanized iron pipe and raised a mound of stone 2 foot diameter to top of cap. Used an electronic measuring device, measuring to a 50d nail in the sidecenter at the root crown of the BT's. The fence cor. is 2 ft. SE of Mon.