


CORNER RESTORATION

N.W. Cor
CORNER Sec. 13 TWP 15 S. RANGE 31 E.

ORIGINAL SURVEY BY: Banford Robb

CONTRACT NUMBER: 357

CONTRACT DATE: July 2, 1880

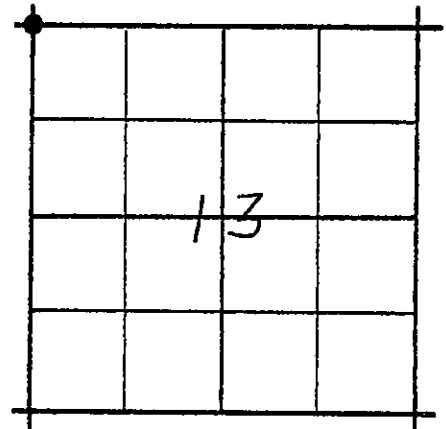

ORIGINAL DESCRIPTION:

80.00-Set basalt stone 12"x10"x6" in mound of stone for the corner to sections 11, 12, 13 & 14 from which,
A pine 30" dia bears S45°E, 6 Lks.
A pine 36" dia. Bears N40°E, 7 Lks.
A pine 30" dia. Bears N40°W, 38 Lks.
A pine 40" dia. Bears S48°W, 64 Lks.

RECEIVED AND
FILED

RESTORATION BY, STAMP AND DATE:

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OCT 16 1972
JOHN LIVEIRA, County Clerk

By _____ Deputy

Robert D. Baggett
OREGON
JULY 12, 1963
ROBERT D. BAGETT
598

Sept. 23, 1972

EVIDENCE FOUND:

Found a 3/4"x18" iron pipe from which 4 ORIGINAL BEARING TREES;
A ground hole of a dead and down 36" pine marked S12, T15, R31, B.T., brs. N80E, 46'
A 24" pine stump marked B.T., BEARS S29°W., 42.2 feet.
A dead and down 24" pine marked B.T., bears S.72°W., 20.0 feet.
A ground hole of a 24" pine marked S11, T15, R., B.T., bears N.68°W., 35.0 feet.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var.

Set 1 1/2"x30" galvanized iron pipe at the location of found iron pipe with a brass cap marked as shown. Buried pipe along side the new pipe. From which NEW BEARING TREES,
A 6" pine bears N65°E., 26.4 feet marked S12 C.S. B.T.
A 6" pine bears S73°E., 24.1 feet marked S13 C.S. B.T.
A 6" pine bears S33°W., 13.3 feet marked S14 C.S. B.T.
A 6" pine bears N35°W., 27.9 feet marked S11 C.S. B.T.

Measured horizontal dist, to blaze on BTs.

Complete and File with Office of the Grant
County Surveyor, Grant County, Oregon,
Courthouse, Canyon City, Oregon 97820

Comp. Var. 20°

