


CORNER RESTORATION

CORNER SW cor. Sec. 23 TWP 15 S RANGE 31E. W.M.

ORIGINAL SURVEY BY: Bamford Robb

CONTRACT NUMBER: 357

CONTRACT DATE: July 2, 1880

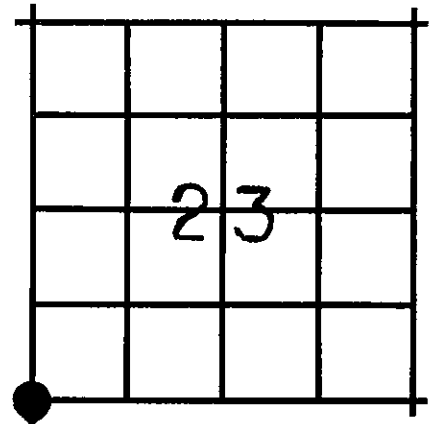

ORIGINAL DESCRIPTION: Set basalt stone 18x10x6 for corner to Sections 22, 23, 26 & 27, from which:

- A fir 20 in. diam. bears N. 65° W., 42 lks. dist.
- A Pine 14 in. diam. bears S. 60° W., 73 lks. dist.
- A Fir 20 in. diam. bears N. 70° E., 50 lks. dist.

RECEIVED AND
FILED

SEP 30 1986

OFFICE OF COUNTY SURVEYOR
Robert D. Bagett
Attest: *J. L. Watson*

RESTORATION BY, STAMP AND DATE:

R. D. Bagett
J. L. Watson

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Bagett

Sept. 5, 1986

OREGON
JULY 12, 1963
ROBERT D. BAGETT
598

Grant County Surveyor.

EVIDENCE FOUND: Found basalt stone 16x7x5 inches at a point N. 26° W., 8.6 ft. from corner position determined from distance swing ties to 3 orig. BT's. I do not believe this to be the original corner stone as it is not marked properly. It is chiseled on each of its four sides with the numbers corresponding to each of the four sections and the numbers 15 and 31 for twp. and range are chiseled below the sec. numbers.

From the corner point, the original BT's:

- A fir 28 ins. diam. bears N. 29° E., 33.3 ft. with scribing visible.
- A P. Pine 20 ins. diam. bears S. 46° W., 48.5 ft. scribing blaze healed over.
- A fir 32 ins. diam. bears N. 15° W., 27.7 ft. scribing blaze healed over.

Record distances swing tie within 0.3 ft.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var.

At the corner point, I set a 1½"x30" galvanized iron pipe 26 ins. in the ground with brass cap marked as shown, from which I take the following corner accessory:

I chiseled X B0 in on the W. face of a bedrock cliff which bears S. 37° E., 15.3 ft. (meas. to X), 1½ ft. above ground on protected face.

I set a steel fence post 5 ft. from cor. and attached attention sign. I attached BT tags and painted 6" red band around BT's.

Buried marked stone E. and alongside iron pipe as a memorial.

Used compass with 20 ° E. var. and steel tape measuring to face of blaze on BT's.

MONUMENT MARKED

