


CORNER RESTORATION

N W cor.
CORNER Sec. 34 TWP 15 S. RANGE 31 E.

ORIGINAL SURVEY BY: Bamford Robb

CONTRACT NUMBER: 357

CONTRACT DATE: July 2, 1880

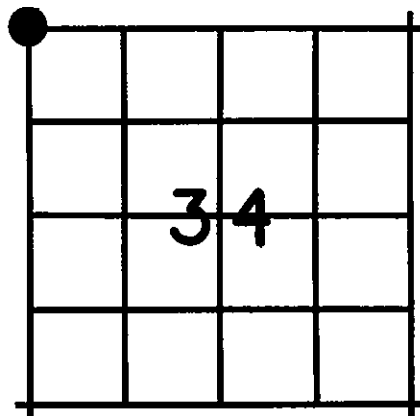

ORIGINAL DESCRIPTION:

North between Sections 33 and 34
Set post for corner to sections 27, 28, 33 and 34
from which:
A Pine 10 ins. diam. bears S. 40° E., 17 lks. dist.
A Pine 20 ins. diam. bears N. 39° E., 42 lks. dist.
A Pine 18 ins. diam. bears N. 32° W., 50 lks. dist.
A Pine 7 ins. diam. bears S. 60° W., 50 lks. dist.

RECEIVED AND
FILED

JUN 20 1986

OFFICE OF COUNTY SURVEYOR

Attest: *Robert D. Baggett*

RESTORATION BY, STAMP AND DATE:

R. D. Baggett
M. D. Baggett

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Baggett
OREGON
JULY 12, 1933
ROBERT D. BAGGETT
598

May 27, 1986

Grant County Surveyor.

EVIDENCE FOUND: From the corner position:

A Pine stump bears N. 51° E., 27.7 feet, blaze healed over. Blaze was cut out and left by loggers, marked S27.
A Pine stump bears S. 37° E., 11.2 feet, healed blaze.
A Pine stump 30 ins. diam. bears N. 29° W., 33.1 feet, blaze healed;
I did not open.
Measured to face of original BT's.
I found no remains of original post.
I established corner position at record distances from the found original BT stumps.

See Record Map of Survey No. 938.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var.

At the corner point, I set a 1½x30 inch galv. iron pipe 28 ins. in the ground with a mound of stone 2 foot base to top of brass cap marked as shown. From which I scribe new BT's:

A P. Pine 8 ins. diam. bears N. 2° E., 11.8 feet marked T15SR31ES27 CSBT.
A P. Pine 8 ins. diam. bears S. 72° E., 85.8 feet marked T15SR31ES34 CSBT.
A P. Pine 12 ins. diam. bears N. 15° W., 77.6 feet marked T15SR31ES28 CSBT.

Nailed brass washer marked OPLS 598 to lower blaze of new BT's. Painted 6" red band around new BT's above blaze and on blaze and attached BT signs and warning signs to BT's. Set steel fence posts approx. 5 feet North from monument and attached appropriate signs. Used magnetic compass with 18° 30' E. var. and steel tape measuring to a 40d nail driven in right side center at root crown of new BT's.

MONUMENT MARKED

