


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner not previously established.



Description of corner evidence found:

NONE

See Record Map of Survey No. 938.

Description of monument and accessories I established to perpetuate the original location of this corner:

At corner point, I set a 2¹/₂x30 inch aluminum pipe with aluminum cap marked as shown 28 inches in the ground, from which I scribe new BT's:


- A Pine, 8 inch diam. bears S. 38° E., 14.7 feet, marked C¹/₄ S34 BT.
- A Pine 10 inch diam. bears S. 37° W., 23.6 feet, marked C¹/₄ S34 BT.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

ROBERT D. BAGETT
JULY 12, 1983
598

Cor. set by: R. D. Bagett
Witnesses : J. L. Watson
M. D. Bagett

June 5, 1986

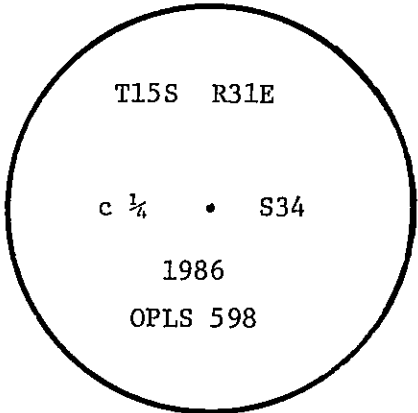

Nailed brass washer marked OPLS 598 to lower blaze of new BT's. Painted 6" red band around new BT's above blaze and on blaze and attached BT signs and warning signs to BT's. Set steel fence posts approx. 5 feet South and East from monument and attached appropriate signs. Used magnetic compass with 18° 30' E. var. Used steel tape measuring to a 40d nail driven in right side center at root crown of new BT's.

Office of.....Surveyor..... County of.....Grant.....
State of.....Oregon....., I hereby certify that the within instrument was filed in this office
for record on the...27... day of...June... , 19...86
..... by
(COUNTY OFFICIAL) (DEPUTY)