


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner not previously established.

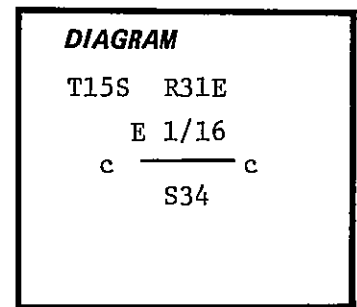

Description of corner evidence found:

NONE



See Record Map of Survey No. 938.

Description of monument and accessories I established to perpetuate the original location of this corner:

At corner point, I set a 2 1/2 x 30 inch aluminum pipe with aluminum cap marked as shown, 27 inches in the ground, from which I scribe new BT's:


A Pine, 8 inch diam. bears N. 68° E., 24.9 feet,
marked CE 1/16 S34 BT.

A Pine, 9 inch diam. bears S. 38° E., 34.7 feet,
marked CE 1/16 S34 BT.



Cor. Set by: R. D. Bagett
Witnesses : J. L. Watson
M. D. Bagett

June 5, 1986

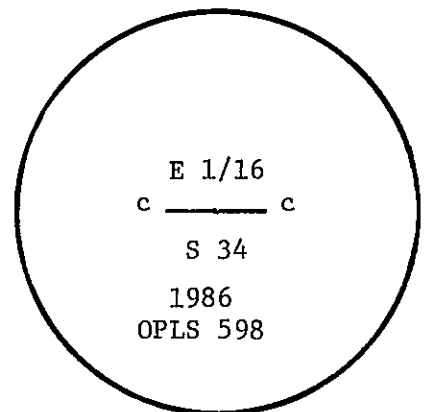

Nailed brass washer marked OPLS 598 to lower blaze of new BT's. Painted 6" red band around new BT's above blaze and on blaze and attached BT signs and warning signs to BT's. Set steel fence posts approx. 5 feet North, South, East and West from monument and attached appropriate signs. Used magnetic compass with 18° 30' E. var. Used steel tape measuring to a 40d nail driven in right side center at root crown of new BT's.

Office of.....Surveyor..... County of.....Grant.....
State of.....Oregon....., I hereby certify that the within instrument was filed in this office
for record on the...20... day of...June... , 1986
..... by
(COUNTY OFFICIAL) (DEPUTY)