

RECEIVED AND
FILED

JAN - 3 1973

JOHN LIVEIRA, County Clerk

CORNER RESTORATION

T. 15 S.
R. 32 E

By Pauline Lemoine Deputy


SW Cor.

CORNER Sec. 20 TWP 15S. RANGE 32E.

ORIGINAL SURVEY BY: Samuel Lackland

CONTRACT NUMBER: 384

CONTRACT DATE: March 29, 1881

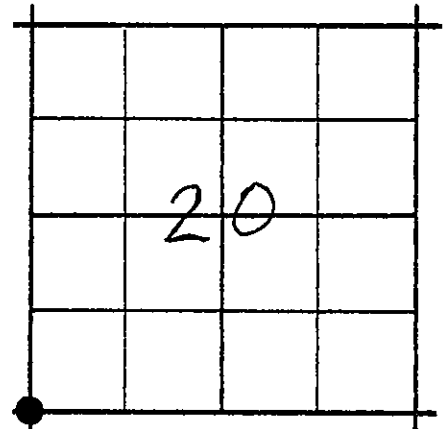

ORIGINAL DESCRIPTION:

Set stone 21"x14"x8" in mound of stone for corner to secs.
19, 20, 29 and 30 From which,
A pine 28" dia. bears N40°W 80 lks. dist.
A pine 36" dia. Bears S68°W 69 lks. dist.

RESTORATION BY, STAMP AND DATE:

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Baggett

OREGON
JULY 12, 1953
ROBERT D. BAGGETT
598

December 13, 1972

EVIDENCE FOUND:

Found a 21"x14"x8" stone with notches clearly visible, set in
a mound of stone, from which a 30" dia. pine snag with scribing
clearly visible bears N40°W, 52.8 feet dist. Accepted stone as
corner position.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var.

Set 1 1/2"x30" iron pipe with brass cap marked as shown, 12" in ground and
placed original stone West and along side pipe and raised a mound of stone
around pipe for the corner to secs. 19, 20, 29 and 30 MONUMENT MARKED

From which NEW BEARING TREES,

A pine 10" dia. bears N14°E, 14.7 ft. Mkd. T15S, R32E, S20 BT

A pine 12" dia. bears S30°E, 7.2 ft. Mkd.

T15S, R32E, S29 BT

A pine 9" dia. bears S75°W, 16.1 ft. Mkd. T15S, R32E, S30BT

A pine 12" dia. Bears N67°W, 4.7 ft. Mkd. T15S, R32E, S19BT

Complete and File with Office of the Grant

County Surveyor, Grant County, Oregon,

Courthouse, Canyon City, Oregon 97820

Compass Variation 20°
Dist. meas. to blaze
of each tree.

