

RECEIVED AND
FILED

JAN - 3 1973

JOHN LIVEIRA, County Clerk

By Charles Lemmon Deputy


CORNER RESTORATION

SW Cor.
CORNER Sec. 21 TWP 15 S. RANGE 32 E.

ORIGINAL SURVEY BY: Samuel Lackland

CONTRACT NUMBER: 384

CONTRACT DATE: March 29, 1881

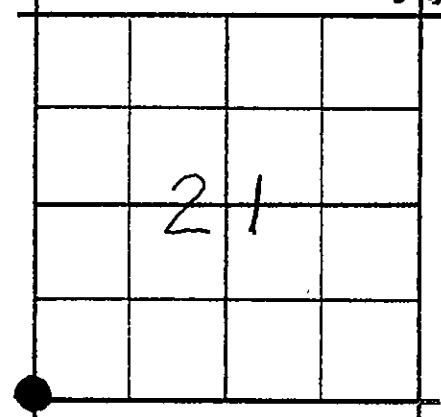

ORIGINAL DESCRIPTION:

Set basalt stone 18"x12"x7" in mound of stone for corner to Sections 20, 21, 28, and 29 from which,

A pine 38" diam. bears S30°E, 234 lks. Dist.

A pine 30" diam. bears N47°W, 235 lks. Dist.

RESTORATION BY, STAMP AND DATE:

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Baggett

OREGON
JULY 12, 1963
ROBERT D. BAGETT
598

December 14, 1972

EVIDENCE FOUND:

Found a 30" diam. pine stump with scribing clearly visible bearing N47°W 154.4 ft. from an iron pin set in a mound of stone. Accepted pin and corner position.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var.

Set 1 1/2"x30" iron pipe with brass cap marked as shown, 24 ins. in ground and placed a mound of stone around the pipe for the corner to Secs. 20, 21, 28, 29 From which NEW BEARING TREES, MONUMENT MARKED

A pine 20" diam. bears N89°E 187.4 ft. dist.
mkd. T15S R32E S21 BT

A pine 18" diam. bears S85°E 160.7 ft. dist.
mkd. T15S R32E S28 BT

A pine 14" diam. bears S66°W 169.6 ft. dist.
mkd. T15S R32E S29 BT

A pine 14" diam. bears N27°W 158.3 ft. dist.
mkd. T15S R32E S20 BT

Distance taken to blaze of each tree.

Complete and File with Office of the Grant

County Surveyor, Grant County, Oregon, Compass Variation 20°
Courthouse, Canyon City, Oregon 97820

