


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:
Not previously established.

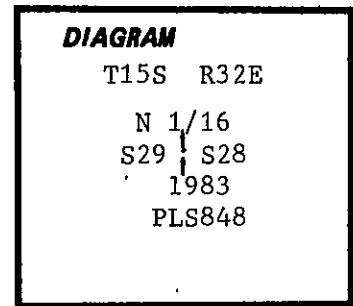

Description of corner evidence found:

Description of monument and accessories | established to perpetuate the
original location of this corner:

Set a 30"x2" aluminum pipe with aa3½" aluminum cap, stamped as shown in diagram.
Set 20" in the ground & placed a ring of stone around pipe.

From Which:

A Pine 16" dia. bears S77°W, 22.4 ft. scribed N1/16 S29 BT.

A Pine 11" dia. bears S44°E, 20.9 ft. scribed N1/16 S28 BT.

Nailed brass washers stamped PLS848, bearing tree & warning signs to each tree.

Set steel posts with warning & boundry signs, North & West 5.0 ft. from corner.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
JULY 12, 1969
DOUGLAS M. FERGUSON
848

Corner monumented 4-6-83

Witnessed by D. Mitchell Ferguson

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 1 day of June, 1983
Robert D. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)

Sec Map of Survey #773