

RECORD OF LAND CORNER MONUMENTATION


CORNER: NW Cor. Sec. 34, Twp. 15S., R.32E., W.M.

ORIGINAL SURVEY BY: Samuel W. Lackland

CONTRACT NUMBER: 384

CONTRACT DATE: March 29, 1881

SUBSEQUENT SURVEY: W.M.H. Woodward 1917, Robert D. Bagett 1976



ORIGINAL G.L.O. DESCRIPTION: Set stone 16x12x7 in mound of stone for cor. to secs. 27, 28, 33 & 34.

1917 HOMESTEAD ENTRY SURVEY NO. 217 BY W.M.H. WOODWARD DATED 02/24/1917.

I adopt this corner for Cor. No. 1 of this survey and mark the same with a cross (X) on top for exact corner point and alongside SW. of corner. Set a basalt stone 24x6x8 ins., 14 ins. in the ground over broken glass, marked 1 HES 217 on side facing claim. No bearings trees within limits.

1976 RESURVEY BY ROBERT D. BAGETT, GRANT COUNTY SURVEYOR DATED 08/26/1976.

Found orig. corner stone 9x7x15 mkd. with 3 notches and 1 notch alongside a stone 24x11x16 mkd as recorded in H.E.S. No. 217 (1 HES 217 and an X on top.) Found broken china buried under H.E.S. Stone as recorded in H.E.S. 217. At corner point: Set 1½"x30" iron pipe 30" in the ground in a md. of stone with brass cap mkd as shown. Buried H.E.S. 217 stone and orig. stone South and alongside Iron pipe. From Which: NEW BT's—A 20" Juniper brs. N.85°E., 139.3 ft. mkd T15SR32ES27CSBT. A 16" Juniper brs. N.29°W., 45.7 ft. mkd S28CSBT. An 18" pine brs. S.71°E., 149.3 ft. mkd T15SR32ES34CSBT. Used compass with 20° East Var. and steel tape measuring to face of BT blaze. See Map of Survey No. 398.

EVIDENCE FOUND: Found 1½" iron pipe with a 2" Grant County Surveyor brass cap in a scattered mound of stone. Near cor. there are two Forest Service guard posts. A Juniper BT (now 22.7") bears N.29°E., with healed blaze. A Juniper BT (now 27.1") bears N.85°E., with healed blaze. A Pine BT (now 32.8") bears S.71°E., with healed blaze—BT partially burned during the 2015 Canyon Creek fire, but may survive.

DESCRIPTION OF MONUMENT AND ACCESSORIES SET:


Set green u-post with attached location tag near mound of stone. Rebuilt mound of stone. Scribed and posted new BT tags with 1976 record bearings and distances on NW and SE BT's.

FROM WHICH, I set the following reference points:

A 5/8" x 30" iron pin, bears S.82°56'E., 11.27 ft., with attached Grant County Surveyor Alum. Cap mkd. RP1 2015.

A 5/8" x 30" iron pin, bears S.0°17'W., 9.98 ft., with attached Grant County Surveyor Alum. Cap mkd. RP2 2015.

Used RTK GPS to measure RP1 & RP2. Bearings to RP's are based on Geodetic North from a GPS observation taken at corner point.

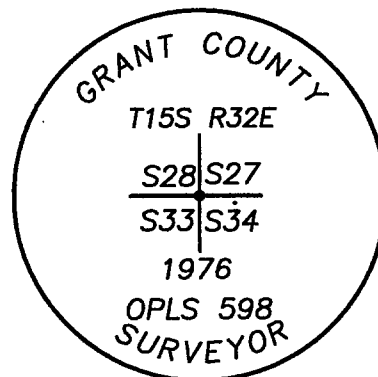

STATE PLANE COORDINATES (3601 ORN)

Reference Datum: NAD83(2011) from an OPUS Solution

Northing: 210,915.1 ft.
Easting: 8,628,934.4 ft.
Ellip. Ht: 4,334.8 ft.


RESTORATION BY:

Michael C. Springer, PLS
Grant County Surveyor
Marcus Teague, Technician
217 N. Canyon Blvd.
John Day, OR, 97845


Surveyed October 28, 2015

RECEIVED AND FILED
GRANT COUNTY SURVEYOR

NOV 20 2015

BY: 

REGISTERED
PROFESSIONAL
LAND SURVEYOR


OREGON
JULY 9, 2002
MICHAEL C. SPRINGER
#70918

EXPIRES: 6/30/2016