

CORNER RESTORATION

S.E. Cor.
CORNER Sec. 34 TWP 15 S. RANGE 32 E., W.M.

ORIGINAL SURVEY BY: Henery W. Cooke


CONTRACT NUMBER: ----

CONTRACT DATE: 1883

RESURVEY: Geo. F. Rigby

Group No. 215

April 19, 1939

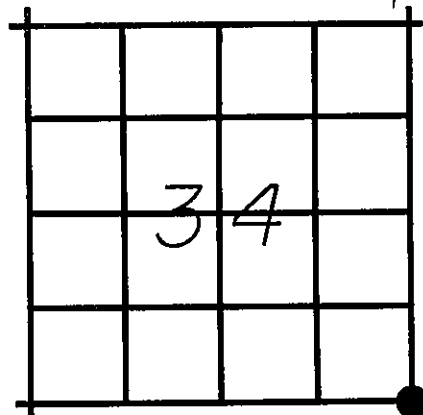

ORIGINAL DESCRIPTION:

RESURVEY BY GEO. F. RIGBY 1939. 80.10 the stand. cor. of Secs. 34 and 35, which is at a point determined from old S.E. bearing tree
Set iron Post, 3 ft. long, 2 ins. diam., 28 ins. in the ground for standard cor. of Secs. 34 and 35, with brass cap mkd as shown below. FROM WHICH:
A pine, 30 ins. diam., brs. N. 62° 45' E., 117 lks. dist., mkd T15SR32ES35 SC BT. (Old BT)
A pine, 26 ins. diam., brs. S. 28° 00' E., 18 lks. dist., mkd T16SR32E SC BT. I cut marks from this old BT.
A pine, 30 ins. diam., brs. N. 20° 45' W., 141 lks. dist., mkd T15SR32E S34 SC BT. (New BT)

RESTORATION BY, STAMP AND DATE:

R. D. BAGETT
W. GENTIS

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Bagett

OREGON
JULY 12, 1963
ROBERT D. BAGETT
598

FEB. 1976

GRANT COUNTY SURVEYOR

EVIDENCE FOUND:

Found 1939 G.L.O. Brass Cap, firmly set and marked as shown below:
From Which:
A 24" pine stump brs. N. 63° E. 77.0 ft. dist. mkd T15SR32E S35 BT
Rigbys BTs: A 34" pine stump brs. N. 21° W. 92.1 ft. dist. mkd 32E SC 34 BT

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:


Show how trees are scribed and basis of bearings, including compass var.

I scribe NEW BEARING TREES:

A 14" pine bears N. 29° E., 29.0 ft. mkd T15SR32E S35 CSBT
A 14" pine bears N. 54° W., 48.0 ft. mkd T15SR32E S34 CSBT

MONUMENT MARKED

Used compass with 20° East var. and steel tape, measuring to face of BT blaze.

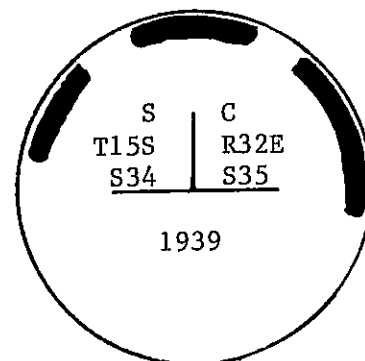

RECEIVED AND
FILED

NOV 29 1976

JOHN LIVEIRA, County Clerk

Barlene Lemon
By _____ Deputy

See Map of Survey No. 398.