

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner was established by Homer D. Angell, US
Deputy Surveyor, during the original survey
Contract No. 725 dated March, 1901.

Set a basalt stone 12x10x6 ins. 8 ins. in the
ground for 1/4 sec. cor. marked 1/4 on W face from
which

A fir 10 ins diam bears S12°E, (33.0')50 lks dist. marked 1/4 S6 BT
A pine 12 ins diam bears N54°W, (17.8')27 lks dist. marked 1/4 S1 BT

DIAGRAM

T15S
R34E R35E

1/4
S 1 | S 6

1990
PLS 699

Description of corner evidence found:

Found the stone with the proper markings firmly set in the ground. A
forest fire moderately burned the area around this corner location between
my preliminary traversing and the setting of the corner monument.

Stump hole (1901 BT) bears at SE record

Lodgepole pine (Dead & Down)(Scribing Visible)(1901 BT) bears at NW record

Description of monument and accessories I established to perpetuate the
original location of this corner:

Set a 2"x30" aluminum pipe with a 2½" aluminum cap, marked as shown in the
diagram, 26" in the ground, replacing the rock which is turned upside down
and buried on the north side of the monument. Built a mound of rock to be
30" in diameter by 4" high around the monument, from which new BTs and
Accessories are:

8" White fir bears S37°45'W, 4.4 feet scribed 1/4 S1 BT

11" White fir bears S68°30'E, 25.2 feet scribed 1/4 S6 BT

A Blue DEEP bears N37°45'E, 2.4 feet buried 13" in the ground

An Orange DEEP bears N68°30'W, 2.1 feet buried 18" in the ground

Attached BT and an Attention signs to and painted a red band around each
BT. Bearings were turned from the control traverse with a theodolite,
basis of bearing being a solar observation that was made on the adjacent
McCoy Cadastral Survey contract in 1987, to stamped brass washers nailed
on new BTs in the scribed red-painted blazes or to the red-painted blazes
or scars on old BTs. Distances were measured from a 60d spike, with an
aluminum washer stamped PLS 699, which was driven into the side of each BT
approximately one foot above the ground.

Set steel fence posts 4.0 feet N and 4.5 feet S of the corner on the
National Forest boundary lines. Attached Forest Boundary signs to each
post and an Attention sign to the N post.



I, Leland L. Myers, 587 E. Auburn St., P.O. Box 98,
Sumpter, OR 97877, do hereby certify that on
September 8, 1990, I monumented the corner as
herein described.

FILED

IN THE OFFICE OF THE Grant COUNTY SURVEYOR.

THIS 30 DAY OF NOV, 1992

Leland L. Myers
Grant County Surveyor

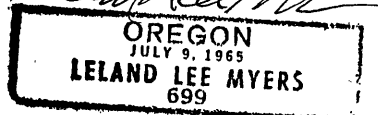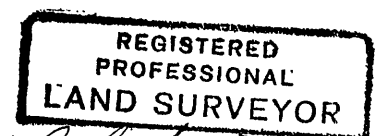

MAP OF SURVEY No. 1197