


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner established in 1900 by George R. Campbell
Set 28"X20"X10" stone, 21" in ground for 1/4 Section corner
marked 1/4 on west face, from which:
a yellow pine, 24" in diam. bears N9⁰E, 62 lks.
a yellow pine, 24" in diam. bears S5⁰W, 22 lks.



Description of corner evidence found:

Found bearing trees:

30" P.Pine, windfall, N9⁰E, 40.9', Scribed 1/4 S5, B.T.
12" Fir, N47⁰E, 6.8', Scribed 1/4 B.T. (by Taylor)
14" Fir, S45⁰E, 10.4', Scribing visible, Could not read (by Taylor)
24" P.Pine, windfall, S45⁰W, 14.5', Scribed 1/4 S6, B.T.

Description of monument and accessories | established to perpetuate the
original location of this corner:

Set 3" Aluminum Cap on 2 1/2" Aluminum pipe 30" long & buried 24" in ground with
mound of stone to cap. Buried original stone on west side of cap.



New Bearing Trees:

10" Fir, S30⁰W, 36.0', Scribed 1/4 S6, B.T.
8" Fir, S35⁰E, 21.6', Scribed 1/4 S5, B.T.

All B.T.'s have 54-4 & 54-3 sign attached. Set steel guard post with 54-9 sign,
4' north of monument. Painted red band around bearing trees. Tagged trees
with L.S. 980 washer.

MONUMENT STAMPED:

Witnesses: David Scott, Party Chief
Richard Larson, Chainman

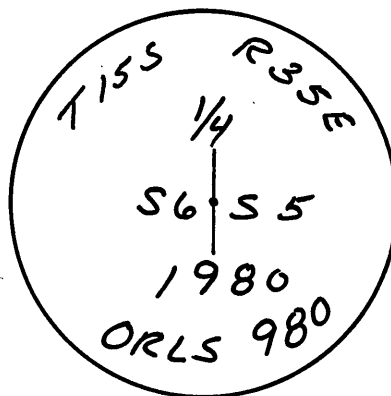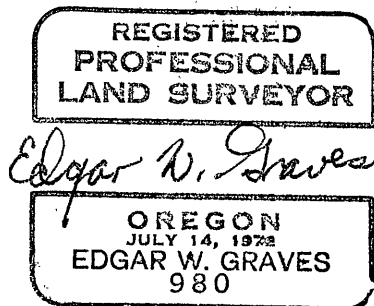

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 14 day of Jan, 1981
Robert D. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)