


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner established in 1900 by George R. Campbell  
Set 20"X12"X9" basalt stone, 15" in ground for 1/4 Section  
corner, marked 1/4 on west face, from which:  
a black pine, 10" in diam. bears S10°E, 20 lks.  
a black pine, 10" in diam. bears S38°W, 18 lks.

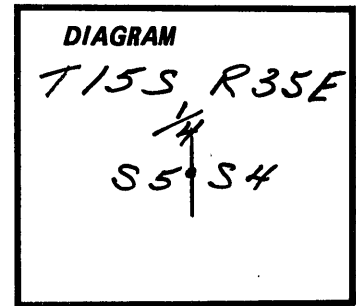

Description of corner evidence found:

Found bearing trees:

14" Black Pine, S37°E, 30.6', Scribed 1/4 S4, (by Taylor)  
10" Black Pine, S10°E, 13.2', Scribed 1/4 S4, B.T. (original-dead & down)  
12" Black Pine, S43°W, 15.6', Scribed 1/4 S5, B.T. (by Taylor)  
12" Black Pine, S38°W, 11.9', Scribed 1/4 S5, B.T. (original-dead & down)

Did not find original stone. Found stone set by Taylor in 1957



Description of monument and accessories | established to perpetuate the  
original location of this corner:

Set 2 1/2" Brass Cap on 2" galvanized pipe, 30" long & buried 2" in ground  
with mound of stone to cap.

No new Bearing trees set. Put on B.T.'s sign 54-4 & 54-3. Set steel guard  
post with 54-9 sign, 3.5' east of monument. Painted red band around bearing  
trees. Tagged trees with L.S. 980 washer.

Witnesses: David Scott, Party Chief  
Richard Larson, Chainman

MONUMENT STAMPED:

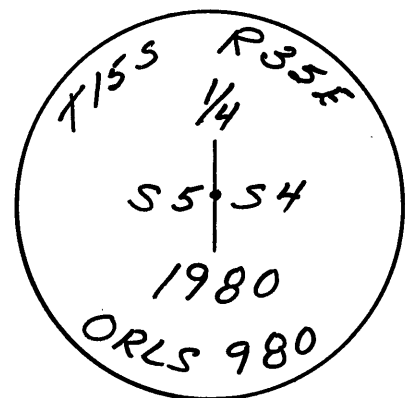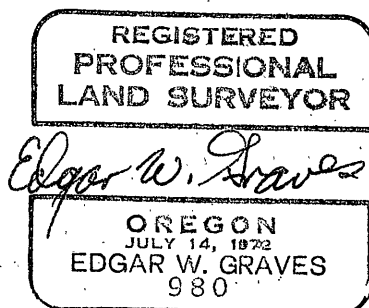

Office of Surveyor County of Grant  
State of Oregon, I hereby certify that the within instrument was filed in this office  
for record on the 14 day of Jan, 1981  
Robert D. Sargent by \_\_\_\_\_  
(COUNTY OFFICIAL) (DEPUTY)