

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner was established by George R. Campbell, US Deputy Surveyor, during the original survey Contract No. 724 dated September, 1900.

Falls on an iron stone, 10x15x12 ins above ground:

I cut a cross (X) at the exact cor point, for 1/4

sec. cor., mark 1/4 on W. side; from which

A black pine 24 ins diam bears S53°E, (19.1')29 lks dist marked 1/4 S2 BT

A black pine 26 ins diam bears S10°W, (19.8')30 lks dist marked 1/4 S3 BT

DIAGRAM

T15S R35E

1/4

S 3 | S 2

1991

PLS 699

Description of corner evidence found:

This corner position falls beside a road or trail to Little Bald Mtn. and is within the Glacier Complex forest fire. All trees have been killed and most of those that were down were consumed. There is a rock approximately 20' southwesterly from the proportioned corner position that may have been the original corner, but no markings on the rock or any scribing on tree remains was found to substantiate it as the corner.

24" black pine (1900 BT) and 26" black pine (1900 BT) not found.

Description of monument and accessories I established to perpetuate the original location of this corner:

Set a 2"x30" aluminum pipe with a 2½" aluminum cap, marked as shown in the diagram, 26" in the ground, at single proportionate measurements from adjacent found corners. Built a mound of rock to be 30" in diameter by 4" high around the monument, from which new BTs and Accessories are:

7" fire-killed and sawed off Lodgepole pine bears N61°E, 9.1 feet scribed 1/4 S3 BT

9" fire-killed and sawed off Lodgepole pine bears N59°W, 6.8 feet scribed 1/4 S2 BT

A Pink DEEP bears S59°E, 2.2 feet and buried 12" in the ground

A Blue DEEP bears S61°W, 2.4 feet and buried 12" in the ground

Attached BT and an Attention signs to and painted a red band around each BT. Bearings were turned from the control traverse with a theodolite, basis of bearing being a solar observation that was made on the adjacent McCoy Cadastral Survey contract in 1987, to stamped aluminum washers nailed on new BTs in the scribed red-painted blazes or to the red-painted blazes or scars on old BTs. Distances were measured from a 60d spike, with an aluminum washer stamped PLS 699, which was driven into the side of each BT approximately one foot above the ground.

Set a steel fence post 4.9 feet S and a wooden post 20.1 feet N of the corner on the National Forest boundary lines. Attached Forest Boundary signs to each post and an Attention sign to the S post.

I, Leland L. Myers, 587 E. Auburn St., P.O. Box 98, Sumpter, OR 97877, do hereby certify that on October 15, 1991, I re-established the corner as herein described.



FILED

IN THE OFFICE OF THE Grant COUNTY SURVEYOR

THIS 30 DAY OF NOV, 1992

Robert D. Bayard

Grant County Surveyor

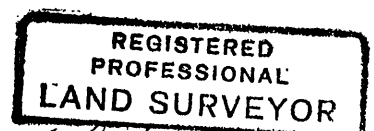

MAP OF SURVEY No. 1197