


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner established in 1900 by Geroge R. Campbell
Set 20"x15"x10" basalt stone, 15" in ground for 1/4 Section
corner, marked 1/4 on north face, from which:
a white fir, 12" in diam. bears S30°E, 32 lks..
a yellow pine, 86" in diam. bears N40°E, 25 lks.

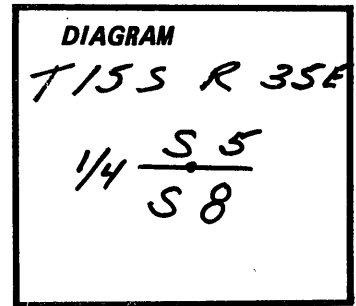

Description of corner evidence found:

Found bearing trees:

30" P.Pine snag, N14°E, 41.9', Scribed S5, 1/4S
36" P.Pine, dead & down, N40°E, 16.5', (Original)
32" P.Pine snag, S37°E, 57.6', Scribed S8, 1/4S
12" Fir stump, S30°E, 21.1', Scribed 1/4, B (Original)

Found original 20"x15"x10" basalt stone, scribed 1/4 set 5" in ground
in mound of stone.

Description of monument and accessories | established to perpetuate the
original location of this corner:

Set 2 1/4" Brass Cap on 2" galvanized pipe 30" long & buried 20" in ground with
mound of stone to cap. Buried original stone on west side of cap.



New Bearing trees:

6" Fir, N58°W, 14.0', Scribed 1/4 S5, B.T.
12" Fir, S68°W, 2.6', Scribed 1/4 S8, B.T.

All B.T.'s have sign 54-4 & 54-3 attached. Set steel guard post with 54-9 sign.
Painted red band around bearing trees. Tagged trees with L.S. 980 washer.

Witnesses: David Scott, Party Chief
Richard Larson, Chainman

MONUMENT STAMPED:

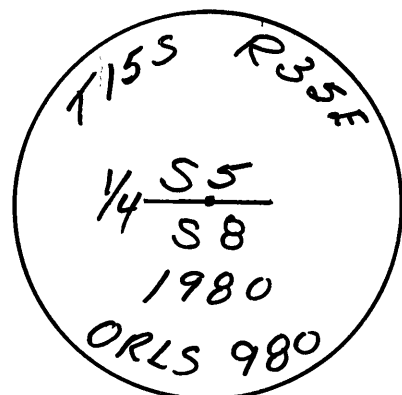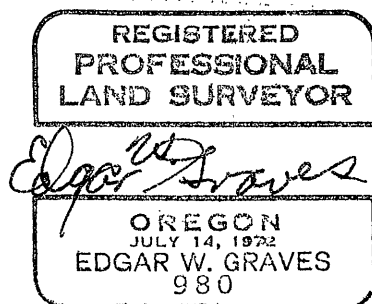

Office of... *Surveyor* ... County of... *Grant* ...
State of... *Oregon* ... I hereby certify that the within instrument was filed in this office
for record on the... *14* ... day of... *Jan* ... 19... *81* ...
Robert D. Baggett by ...
(COUNTY OFFICIAL) (DEPUTY)