

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner was established by George R. Campbell, US Deputy Surveyor, during the original survey Contract No. 724 dated September, 1900.

Set an iron stone 28x12x10 ins. 20 ins. in the ground for 1/4 sec. cor. marked 1/4 on N face from which

A white fir 15 ins diam bears S45°W, (21.8')33 lks dist. marked 1/4 S18 BT

A red fir 36 ins diam bears N40°W, (2.6')4 lks dist. marked 1/4 S7 BT

**DIAGRAM
T15S R35E**

**S 7
1/4—
S18**

**1990
PLS 699**

Corner was maintained by Howard E. Taylor, RPE 2891, during a retracement survey dated August, 1957.

Found original marked single stone. The original 15" White fir is actually a small living double red fir with 8" and 14" trunks. It was scribed almost at ground level and I rescribed it several feet above original scribe which is partially visible. The original 36" Red Fir is now 44" o.k.

Description of corner evidence found:

Found the marked stone firmly set in the ground.

15" & 9" double-stemmed White fir (Good Condition)(Blaze Healed Over)(1900 BT) bears S38°45'W, 22.1 feet.

32" White fir (Fair Condition)(Scribing Visible)(1900 BT) bears N30°W, 1.6 feet. Distance is measured from a 60d spike in the blaze because the tree is so close to the monument.

Description of monument and accessories I established to perpetuate the original location of this corner:

Set a 2"x30" aluminum pipe with a 2½" aluminum cap, marked as shown in the diagram, 26" in the ground, replacing the rock which is turned upside down and buried on the north side of the monument. Built a mound of rock & earth to be 30" in diameter by 4" high around the monument, from which new Accessories are:

No new bearing trees set because others are not necessary.

A Blue DEEP bears N38°45'E, 2.0 feet buried 10" in the ground

A Pink DEEP bears S30°E, 1.9 feet buried 12" in the ground

Attached BT and an Attention signs to and painted a red band around each BT. Bearings were turned from the control traverse with a theodolite, basis of bearing being a solar observation that was made on the adjacent McCoy Cadastral Survey contract in 1987, to stamped brass washers nailed on new BTs in the scribed red-painted blazes or to the red-painted blazes or scars on old BTs. Distances were measured from a 60d spike, with an aluminum washer stamped PLS 699, which was driven into the side of each BT approximately one foot above the ground.

Set steel fence posts 5.0 feet E and 4.3 feet W of the corner on the National Forest boundary lines. Attached Forest Boundary signs to each post and an Attention sign to the E post.



I, Leland L. Myers, 587 E. Auburn St., P.O. Box 98, Sumpter, OR 97877, do hereby certify that on September 5, 1990, I monumented the corner as herein described.

FILED

IN THE OFFICE OF THE Grant COUNTY SURVEYOR

THIS 30 DAY OF Nov 92, 19

Robert D. Bayne
Grant County Surveyor

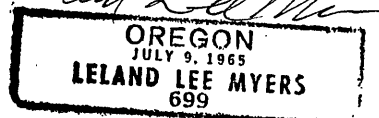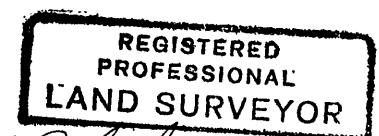

MAP OF SURVEY No. 1197