


# CERTIFIED RECORD OF LAND CORNER MONUMENTATION

## History of original corner establishment:

Corner established in 1900 by George R. Campbell  
Set 12"X10"X8" basalt stone, 8" in ground for corner  
of Section 7, 8, 17 & 18, from which:  
a black pine, 10" in diam., bears N49°E, 17 lks.  
a red fir, 22" in diam., bears S30°E, 25 lks.  
a white fir, 22" in diam., bears S30°W, 75 lks.  
a black pine, 9" in diam., bears N64°W, 35 lks.

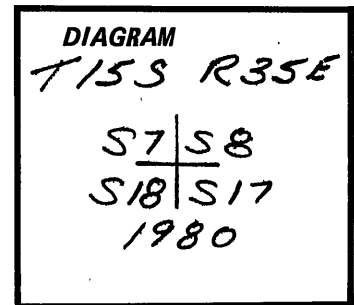

## Description of corner evidence found:

### Found bearing trees:

9" Black Pine windfall, N64°W, 23.1', Scribed T15S, R35E, S7 B.T.  
8" Fir, N63°W, 5.9', Scribed S7  
7" Fir, N12°W, 17.0', Scribed S7, B.T.  
12" Fir, N10°E, 19.0', Scribed S8, B.T.  
10" rotted log, N49°E, 10.0', Scribed T15S, R35E, S8, B.T. original  
8" Fir, N75°E, 11.2', Scribed S8  
30" Fir stump, S30°E, 16.5', Scribed 15S original  
36" Fir, S30°W, 49.5', Blaze scar, did not open  
Found original notched stone with 5 notches on East face and 4 notches on South face, in small mound of stone.

## Description of monument and accessories | established to perpetuate the original location of this corner:

Set 3" Aluminum cap on 2½" Aluminum pipe 30" long & buried 20" in ground with mound of stone to cap. Buried original stone along side cap.



### New Bearing trees:

13" Fir, S51°E, 26.9', Scribed T15S, R35E, S17, B.T.

B.T. has sign 54-4 & 54-3 attached. Set steel guard post with 54-9 sign, 4' west of monument. Painted red band around bearing trees. Tagged trees with L.S. 980 washer.

### MONUMENT STAMPED:

Witnesses: David Scott, Party Chief  
Richard Larson, Chainman

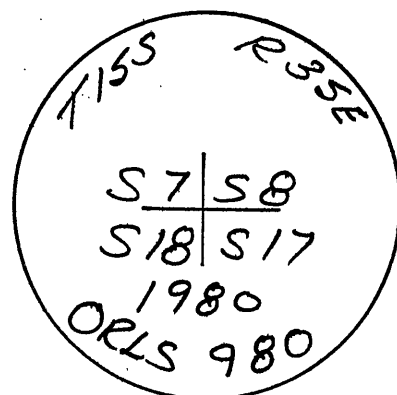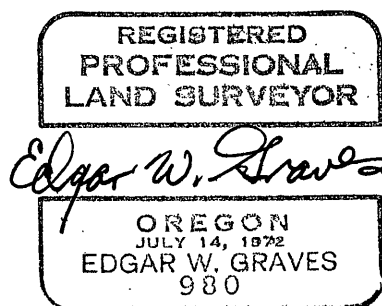

Office of... *Surveyor* ... County of... *Grant* ...  
State of... *Oregon* ... I hereby certify that the within instrument was filed in this office  
for record on the... *14* day of... *Jan* ... 19*81*..  
... *Robert D. Baggett* ... by ...  
(COUNTY OFFICIAL) (DEPUTY)