


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner established in 1900 by George R. Campbell
 Set 15"X10"X5" stone, 10" in ground for 1/4 Section corner
 marked 1/4 or north face, from which:
 a yellow pine, 28" in diam. bears N40°E, 39 lks.
 a yellow pine, 90" in diam. bears S59°W, 61 lks.

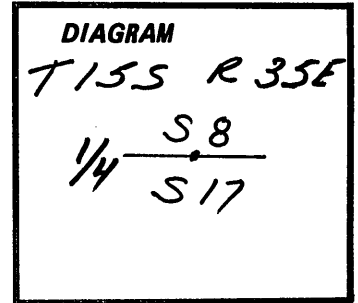

Description of corner evidence found:

Found bearing trees:

30" P.Pine stump, N70°E, 25.7', Scribed S8, B.T.
 32" P.Pine stump, S59°W, 40.7', Scribed 1/4 S. 17

Found original stone with 1/4 scribed in face about 10' down hill from intersection of 2 B.T. stumps.

Description of monument and accessories I established to perpetuate the original location of this corner:

Set 2½" Brass Cap on 2" galvanized pipe, 30" long & buried 24" in ground with mound of stone to cap. Buried original stone on south side of monument.



New Bearing Trees:

4" Fir, N34°E, 11.2', Scribed 1/4 S8, B.T.
 4" P.Pine, S40°W, 66.0', Scribed 1/4 S17, B.T.

All B.T.'s have sign 54-4 & 54-3 attached. Set steel guraad post with 54-9 sign, 3.5' east of monument. Painted red band around bearing trees. Tagged trees with L.S. 980 washer.

MONUMENT STAMPED:

Witnesses: David Scott, Party Chief
 Richard Larson, Chainman

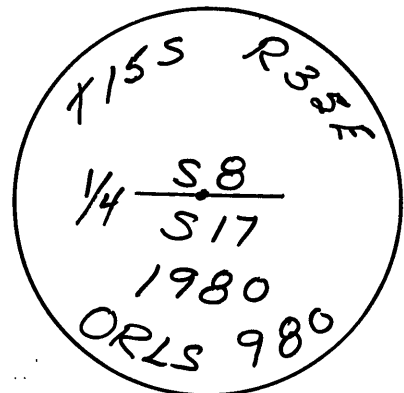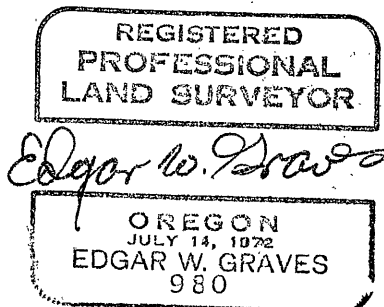

Office of... *Surveyor* ... County of... *Grant* ...
 State of... *Oregon* ... I hereby certify that the within instrument was filed in this office
 for record on the... *14* ... day of... *June* ... 19...
Robert W. Baker by _____
 (COUNTY OFFICIAL) (DEPUTY)