


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner established in 1900 by Gerooge R. Campbell
Set 15"X10"X10" basalt stone, 10" in ground for corner
of Section 8, 9, 16 & 17, from which:

- a yellow pine, 40" in diam. bears N63°E, 23 lks.
- a tamarack, 16" in diam. bears S90°E, 93 lks.
- a tamarack, 20" in diam. bears S58°W, 23 lks.
- a tamarack, 14" in diam. bears N63°W, 23 lks



Description of corner evidence found:

Found original bearing trees:

- 48" P.Pine, N75°E, 15.2', Scribed scar, did not open
- 16" Tamarack, S90°E, 21.8', Scribed T15S, R35E, S16 B.T. dead & down
- 20" Tamarack, S58°W, 15.2', Scribed T15S, R35E, S17, B.T. dead snag
- 14" Tamarack, N58°W, 15.2', Scribed T15S, R35E, S8, B.T. dead & down

Found bearing trees by Taylor

- 12" Fir, S44°E, 23.3', Scribed S16, B.T.
- 16" Fir snag, S56°W, 18.8', Scribed S17, B.T.
- 12" Fir, N54°W, 18.2', Scribing visible but not readable

Found original stone 15"X10"X10" with 4 notches on the south & east edges.

Description of monument and accessories I established to perpetuate the
original location of this corner:

Set 2½" Brass Cap on 2" galvanized pipe 30" long & buried 24" in ground
with mound of stone to cap. Buried original stone on south side of
Monument.



New Bearing trees:

- 8" Fir, N48°E, 44.2', Scribed T15S, R35E, S9, B.T.
- 7" Fir, S36°W, 33.5', Scribed T15S, R35E, S17, B.T.

All B.T.'s have sign 54-4 & 54-3 attached. Set steel guard post with
54-9 sign, 3' west of monument. Painted red band around bearing trees.
Tagged trees with L.S. 980 washer.

MONUMENT STAMPED:

Witnesses: David Scott, Party Chief
Richard Larson, Chainman

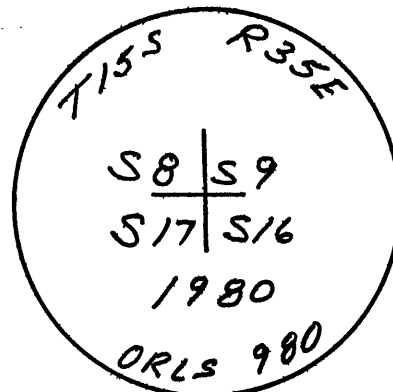

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 14 day of Jan, 1981
Robert D. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)