


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner established in 1900 by George R. Campbell
Set 28"x24"x24" stone in ground for 1/4 Section Corner
marked 1/4 on West face, from which:
a black pine, 12" in diam., bears S180°E, 38 lks.
a black pine, 14" in diam., bears N40°W, 36 lks.



Description of corner evidence found:

Found bearing trees set by Taylor

16" Fir, N82°W, 24.6', Scribing visible but not readable
16" Fir, N70°E, 24.8', Scribed S, S16

Found original stone 28"x24"x24" with 1/4 scribed on west face.

Description of monument and accessories I established to perpetuate the original location of this corner:



Set 2 1/2" Brass Cap on 2" galvanized pipe 30" long & buried 16" in ground with mound of stone to cap.

No additional bearing trees set.

B.T.'s have sign 54-4 & 54-3 attached. Set steel guard post with 54-9 sign, 3.5' north of Monument. Painted red band around bearing trees.

Witnesses: David Scott, Party Chief
Richard Larson, Chainman

MONUMENT STAMPED:

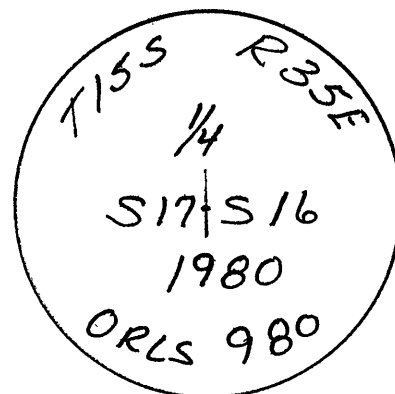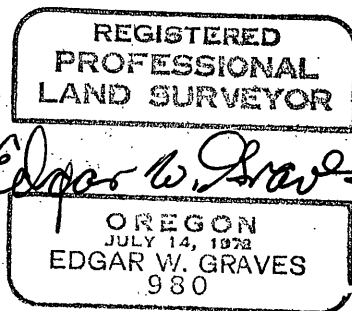

Office of *Surveyor* County of *Grant*
State of *Oregon*, I hereby certify that the within instrument was filed in this office
for record on the *14* day of *Jan*, 19*81*.
Robert R. Basset by _____
(COUNTY OFFICIAL) (DEPUTY)