


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner established in 1900 by George R. Campbell
Set 15"X10"X8" basalt stone 10" in ground for 1/4 section
corner marked, 1/4 on north face, from which:
A black pine, 18" in diam bears N85°E, 11 lks.
A red fir, 28" in diam. bears S70°W, 63 lks.

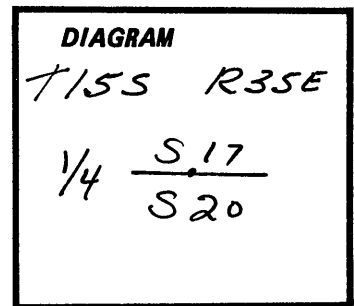

Description of corner evidence found:

Found bearing trees:

20" Black Pine, N31°E, 23.0', Scribed 1/4S, B.T.
22" Fir, S8°W, 3.2', Scribed 1/4 S, B.T.
30" Fir snag, 15' tall, S57°W, 40.9', Scribed 1/4 S19, B.T.

Found original 15"X10"X8" stone with 1/4 scribed on north face, buried 8"
in ground. Stone broke upon removal. Buried stone on north side of
monument.

Description of monument and accessories I established to perpetuate the
original location of this corner:

Set 2½" Brass Cap on 2" galvanized pipe 30" long. Buried original stone
on the north side of monument.



New Bearing trees:

7" Black Pine, N81°W, 6.2', Scribed 1/4 S17, B.T.

B.T. has sign 54-4 & 54-3 attached. Set steel guard post with 54-9 sign, 3.1'
east of monument. Painted red band around bearing trees. Tagged tree with
L.S. 980 washer.

Witnesses: David Scott, Party Chief
Richard Larson, Chainman

MONUMENT STAMPED:

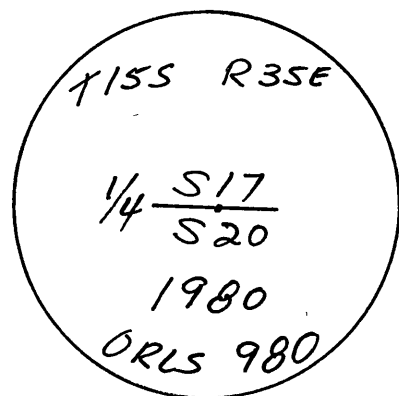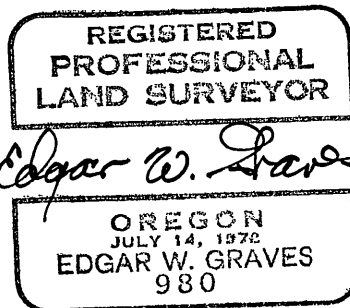

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 14 day of Jan, 1981
Robert D. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)