


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner established in 1900 by George R. Campbell
Set 19"X10"X8" basalt stone, 10" in ground for corner of
Section 16, 17, 20 & 21, from which:

- a black pine, 15" in diam., bears N37°E, 63 lks.
- a white fir, 10" in diam., bears S51°E, 32 lks.
- a black pine, 10" in diam., bears S45°W, 29 lks.
- a yellow pine, 15" in diam., bears N9°W, 54 lks.

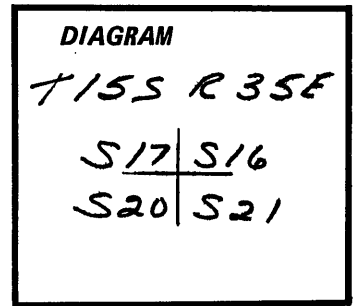

Description of corner evidence found:

Found original bearing trees:

- 10" Black Pine snag, S41°W, 21.1', Scribed T15S, R35E, S20, B.T.
- 26" Fir, S51°E, 19.1', blaze scar, did not open
- 17" Pine, down & rotted, Scribed T15S, R35E, S17, B.T.
(out of position by road construction)

Found original notched stone with 4 notches on east face and 3 notches on south face.

Description of monument and accessories I established to perpetuate the original location of this corner:

Set 2½" Brass Cap on 2" galvanized pipe 30" lone & buried 24" in ground with mound of stone to cap. Original stone buried on east side of cap.



New Bearing trees:

- 6" P.Pine, N29°E, 47.6', Scribed T15S, R35E, S16, B.T.
- 9" Fir, S52°W, 33.1', Scribed 15S, R35E, S20, B.T.
- 14" Fir, N68°W, 114.9', Scribed T15S, R35E, S17, B.T.

All B.T.'s have 54-4 & 54-3 sign attached. Set steel guard post 3' west of monument with 54-9 sign attached. Painted red band around bearing trees. Tagged trees with L.S. 980 washer.

MONUMENT STAMPED:

Witnesses: David Scott, Party Chief
Richard Larson, Chainman

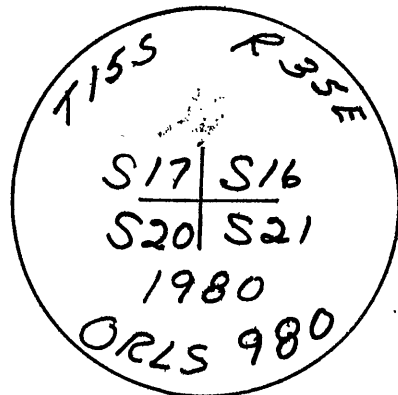

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 14 day of Jan, 1981
Robert D. Duggett by _____
(COUNTY OFFICIAL) (DEPUTY)