


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Original survey by Henry W. Cooke in 1883 but the monuments were obliterated by George R. Campbell in a retracement survey in 1901 at which time Campbell set a new section corner at a position which by his record was East 1.90 chains of the old position.

Campbell retracement corner: Basalt stone, 18"X12"X12", 12" deep with SC marked on N. face, with 4 grooves on E. face, 2 grooves on W. face; from which a 24" red fir bears N40°E, 45 links, and a black pine 12" dia. bears N3°W 34 links.

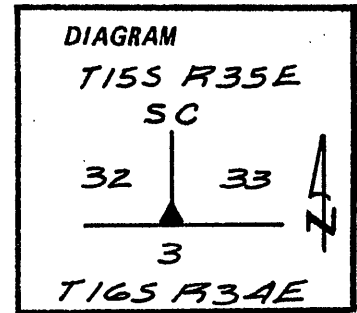

Description of corner evidence found:

16X12X10 stone with 4 grooves on East, 2 grooves on West, and marked SC on North side. 24" red fir stump of snag found N40°E, 30.2' to CL, scribed "SC T15S R35E S33 T". Pine now missing.

Description of monument and accessories I established to perpetuate the original location of this corner:



I replaced said stone with a 2½"X30" alum. cap set 25" in ground in a small stone mound. Buried original stone on West side of pipe flush with ground with SC facing up. From the above monument bear the following trees which I marked: 6" Lodgepole pine, N41½°W, 24.2' to face and 24.5' to CL, mkd: "T15S R35E SCS 32 BT"
10" tamarack, N88°E, 28.5' to face, 28.9' to CL, mkd: "T15S R35E S33SC BT"

Both trees have painted red faces and red bands & also a brass washer stamped LS 1658 attached to bottom of face.


Bearings determined with staff compass using 17°E Var.

Witnessed by: Randall Schulson Aug. '83.

Alum. cap marked thus:

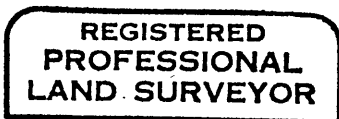

Ronald H. Schulson

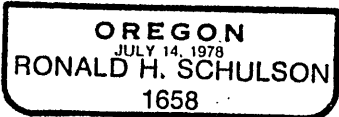

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office for record on the 30 day of Nov, 1983
Ronald H. Schulson by _____
(COUNTY OFFICIAL) (DEPUTY)