RECORD OF LAND CORNER MONUMENTATION

EAST 1/4 CORNER SECTION 35, T. 15 S., R. 29 E., W.M.

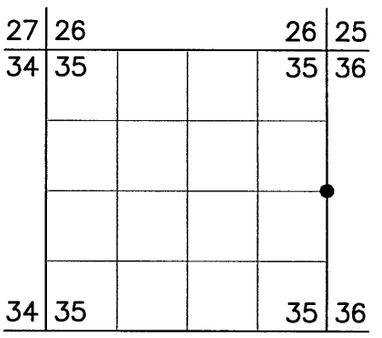

ORIGINALLY ESTABLISHED BY: Samuel W. Lackland, U.S. Deputy Surveyor

CONTRACT NUMBER: 384

CONTRACT DATE: March 29, 1881

SUBSEQUENT SURVEYS:
Remonumented by Carl E. Sundet, PLS, filed October 23, 1981 in the Grant County Surveyor's records.

ORIGINAL DESCRIPTION: Set stone 14"x6"x4" in mound of stone, from which:
A Pine 48 in dia bears N85°W 29 lks dist

SUNDET'S DESCRIPTION: Found 14"x6"x4" stone, with ¼ on west face, 4" below ground. Found decayed ponderosa pine stump N.59°W., 29 links distance, no scribing.
Set 2½"x30" aluminum pipe with a 3¼" aluminum cap 26" in ground. Buried original stone alongside of new monument. Cap marked:
Bearing trees:
a ponderosa pine 13" in diameter bears S.84°W., 22.4 feet distance, scribed "1/4S35" in upper blaze and "BT" and brass tag stamped RLS 1664 in lower blaze.
a ponderosa pine 10" in diameter bears S.88°E., 10.1 feet distance, scribed "1/4S36" in upper blaze and "BT" and brass tag stamped RLS 1664 in lower blaze.

EVIDENCE FOUND: Found a 2½" aluminum pipe with a 3¼" aluminum cap (marked as shown below), projecting 4" above ground with no mound of stone. From which:

- A 19" dbh ponderosa pine bears S83°E, 22.4 feet distance, with healed double blaze.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:
I accept the found aluminum monument for the true 1/4 corner position.

From which, I SCRIBE THE FOLLOWING NEW BEARING TREE:

- A 16" dbh western larch bears N.27°W., 59.04 ft. marked "*1/4 S35*" in upper blaze and "*BT*" in lower blaze

I also SET THE FOLLOWING REFERENCE POINTS:

- A 5/8"x30" iron pin driven flush with the ground bears N48°E, 14.41 ft., with attached 2½" aluminum cap marked "*RP 1 2021 PLS 69454*"
- A 5/8"x30" iron pin driven flush with the ground bears S34°E, 14.78 ft., with attached 2½" aluminum cap marked "*RP 2 2021 PLS 69454*"

MONUMENT MARKED:



Painted a 6 inch red band around the bearing trees, and also painted the blazes red. Attached USFS signs 54-3 and 54-9 to the bearing trees.
Distances to accessories were measured with a steel tape. Distance to new bearing tree was measured to a 60d nail driven in the side-center right at the root crown of the tree, with an attached 1½" brass washer stamped "PLS 69454".. Bearings were measured with a magnetic compass with 14° East declination. A steel T post with USFS signs 54-2 and 54-4 attached bears West, 3 feet from corner, and a steel T post with USFS sign 54-2 attached bears South, 3 feet from corner.

RESTORATION BY, STAMP AND DATE:

Work Performed May 6, 2021 by:

Jason L. Hatfield, PLS
Vincent Kelly, Survey Tech
Doug Crawford

USDA FOREST SERVICE
NORTHEAST OREGON LANDS ZONE
1550 Dewey Avenue, Suite A
Baker City, OR 97814
(541) 523-1337

RECEIVED AND FILED
GRANT COUNTY SURVEYOR

JUN 24 2021

BY:

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
NOVEMBER 30, 2007
JASON L. HATFIELD
#69454

EXPIRES: 6/30/2023