

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:



Original corner set by C. Albert White, under Group No. 359, approved May 1, 1962.
record states:

Set an iron post, 28 ins. long, 2½ ins. diam., 16 ins. in the ground, to bedrock, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.

from which:

A pine, 20 ins. diam., bears N. 50° E., 93 lks. dist.,
marked: E1/16 S32 BT.

A juniper, 6 ins. diam., bears S. 64½° W., 56 lks. dist.,
marked: E1/16 S5 BT.

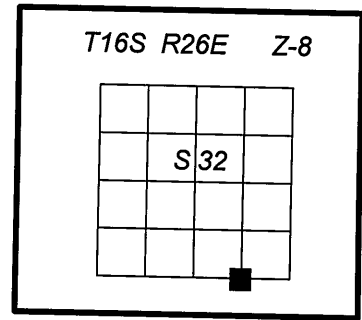

Subsequent Monumentation:

This corner was recovered and used by Marcellus A. Palmer, LS 350, during survey filed with the Grant County Surveyor in 1964 as Map of Survey 62.

Palmer's record states

Corner monumented 1960 Cadastral Survey

[no further description of corner monument or accessories given by Palmer]

Description of corner evidence found:

Found a standard BLM 3¼ ins. diam. brass cap on a 2½ ins. diam. galv. iron post, projecting 12 ins. above ground, firmly set, in a stone mound, 4 ft. base, 1 ft. high, mkd. as shown above;
from which

A cut pine stump, 20 ins. in diam., bears N. 50° E., 93 lks. dist., with fragmentary scribe mks.

A juniper, 10 ins. diam., alive and healthy, bears S. 64½° W., 56 lks. dist., with partially healed blaze and scribe mks. visible.

Description of monument and accessories I established to perpetuate original location of this corner:

During Grant County Survey No. MS - 1833:

rebuild mound of stone.

new accessory:

A ponderosa pine, 7 ins. diam., bears N. 20° W., 61.6 ft. dist., marked: X BT.

NAD'83 (CORS '96) geographic position:

Lat. 44°07'59.09"N



Long. 119°37'21.96"W

All bearing trees are painted with red bands, and have Bearing Tree (54-3) and Land Survey Monument (54-9) signs attached. All new bearing trees have a metal washer stamped "LS 2648" on the side-center nail.

Posted National Forest Boundary north and east from corner with Property Boundary (54-2) signs, and a Land Survey Monument (54-9) sign on nearby post.

I hereby certify that the corner was monumented and accessories taken as described, using a Leica Total Station on October 19, 2007.

Witnesses: Leo Castillo, Kristina Powell, Tony Bauck



Renewal Date: June 30, 2008

Office of County Surveyor County of Grant
State of Oregon , I hereby certify that the within instrument was filed in this office
for record on the 19 day of FEB, 2008
..... by
(COUNTY OFFICIAL) (DEPUTY)