

RECORD OF LAND CORNER MONUMENTATION


CORNER: SW Cor. Sec. 35, T.16S., R.26E., W.M.

ORIGINAL SURVEY BY: Alonso Gesner

CONTRACT NUMBER: 206

CONTRACT DATE: July 10, 1874

SUBSEQUENT SURVEY: C. Albert White 1957



ORIGINAL G.L.O. DESCRIPTION: Set stone 14x12x4 for cor. to secs. 2, 3, 34 and 35.

1957 RESURVEY BY C. ALBERT WHITE, CADASTRAL SURVEYOR UNDER SPECIAL INSTRUCTIONS DATED 10/3/1957 INCLUDED UNDER GROUP NO. 359 (Pg. 325-326): SEE RECORD MAP OF SURVEY NO. 58.

The cor. of secs. 2, 3, 34, and 35, monumented with a basalt stone, 12 x 12 x 4 ins., loosely set, 4 ins. in the ground, mkd. with 2 grooves on E. face, 4 grooves on W. face and 17/26 on S. face.

At the corner point

Set an iron post, 28 ins. long, 2 $\frac{1}{2}$ ins. diam., 22 ins. in the ground, with brass cap mkd.

T 16 S R 26 E
S 34 | S 35
S 3 | S 2
T 17 S
1959

from which

A pine, 12 ins. diam., bears N. 51° E., 84 lks. dist.,
mkd. T16S R26E S35 BT.

A pine, 27 ins. diam., bears S. 40° E., 108 lks. dist.,
mkd. T17S R26E S2 BT.

A pine, 17 ins. diam., bears S. 9° W., 155 lks. dist.,
mkd. T17S R26E S3 BT.

A pine, 22 ins. diam., bears N. 14 $\frac{1}{2}$ ° W., 155 lks. dist.,
mkd. T16S R26E S34 BT.

Deposit original corner stone alongside iron post.

EVIDENCE FOUND:

None. No field visit was made for this Corner Restoration Report, it has been prepared from record General Land Office and Bureau of Land Management field notes. See Record Map of Survey 58 filed in the Grant County Surveyor's Office.

PREPARED BY:


Michael C. Springer, PLS
Grant County Surveyor
Marcus Teague, Technician

217 N. Canyon Blvd.
John Day, OR, 97845
(541) 575-1251

January 9, 2017

RECEIVED AND FILED
GRANT COUNTY SURVEYOR

JAN 10 2017

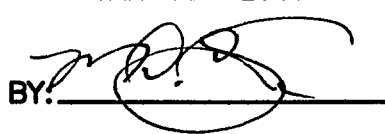BY: 

REGISTERED
PROFESSIONAL
LAND SURVEYOR


OREGON
JULY 9, 2002
MICHAEL C. SPRINGER
#70918

EXPIRES: 6/30/2018