


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment: (CONTINUED)


B.L.M. Survey, U.S. Survey Group No. 882 dated Aug. 26, 1975 and March 23, 1976 by Oviatt and Rogers notes: From this point, the original closing cor. of Secs. 1 and 2, T.16S., R.27E., bears South, 0.47 Chs. dist., determined from the remains of the original bearing trees: A sawed Ponderosa Pine stump, 63 ins. diam. bears N.8°E., 52 Lks dist., with scribe marks CCBT visible on open blaze (record, 49 Lks. to face), a sawed Ponderosa Pine stump, 56 ins. diam. bears S.4°W., 171 Lks. dist., with scribe marks 27S2BT visible on open blaze. (Record, 161 Lks.) C.S. 897, Robert D. Baggett, LS 598, Oct., 1985, states: Found 2 by stumps.

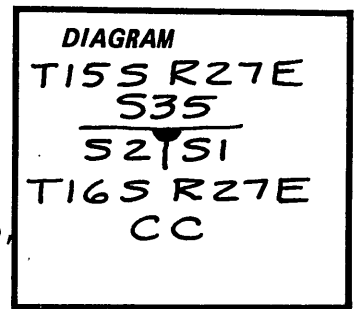

A-21
F.B.2 Pgs.50-52

Description of corner evidence found:

Description of monument and accessories | established to perpetuate the original location of this corner:



REGISTERED
PROFESSIONAL
LAND SURVEYOR

David B. Armstrong

6/26/87 OREGON
AUGUST 22, 1973
DAVID B. ARMSTRONG
1026

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 6 day of Aug, 1987
Robert D. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)